

LED Adjustable - GU10



2 Power - 4 Watts / 6 Watts - Adjustable

3 CCT - 3000K / 4000K / 6000k - Adjustable

KR337 Series



*Note: GU10 is AC direct input, no LED driver required
Existing light muts be on GU10 holder to fit

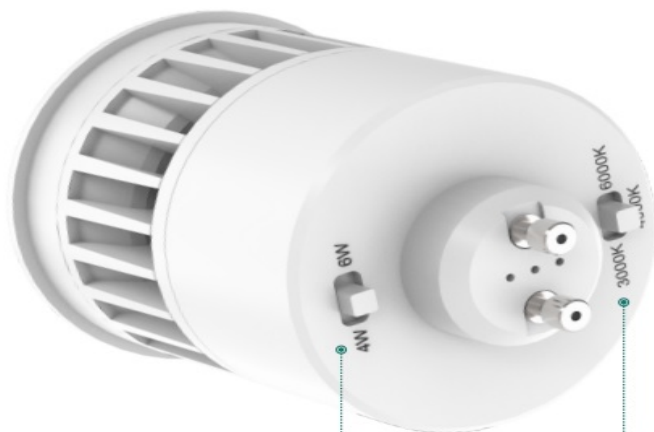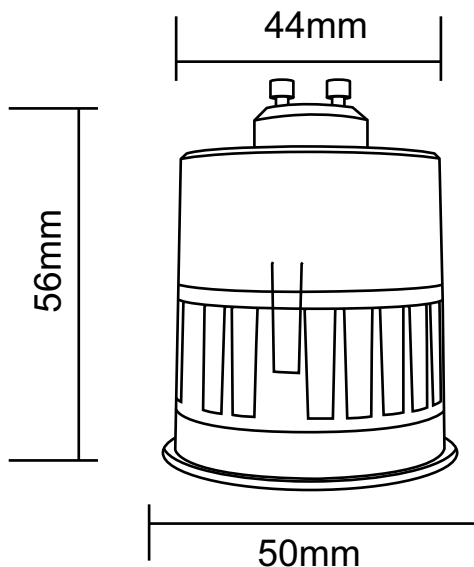

**4W
6W**



**3000K
4000K
6000K**





General Features:

- Dual wattage control: 4W/6W selectable
- 3CCT: 3000K 4000K 6000K selectable via switch
- Flicker Free Driver: For better visual comfort
- Triac Dimmable, Compatible to most branded dimmers, and C-bus2 system
- IP40 Rated
- CE and RoHS approved, Complies with new ERP regulation
- 3 years warranty


Technical Specifications

Model No.		KR337-GU0406-3C
Dimension(mm)		Ø 50*56mm
Cutout(mm)		/
Wattage(w)		4W/6W switchable
Input Voltage(v)		AC200~240V
Light Source		SMD2835
SDCM		<6
4 CCT(K)		3000-4000-6000K Switchable
Luminous Flux (lm)±5%		4W (400-480lm) 6W(600-720lm)
CRI		>80Ra
Beam Angle(°)		38 / 60°
Tilttable		/
Driver option		Triac Dimming, flicker free
Fire Rated		/
Protection Class		/
Degree of protection(IP)		IP40
Material	Housing	Aluminum
	Diffuser	PC
Housing Color		White / Black
L70		>54000Hrs
Operation Temp.(°C)		-20~ 45°C
Installation		Recessed Mount
Certificates		CE, Rohs, SAA & C-tick
Warranty		3 Years

Packing information

Model Number	Weight/Luminaire (kg)	QTY/BOX (pcs)	Inner Box Size (mm)	Weight/Box (kg)	QTY/CTN (pcs)	Carton Size (cm)	Weight/CTN (kg)	QTY/20GP (PCS)	QTY/40GP (PCS)	QTY/40HQ (PCS)
KR337-GU0406-3C	0.23	1	50*50*65	0.28	100	26.5*26.5*28	14.50	134,400	275,200	309,600

Installation Instructions

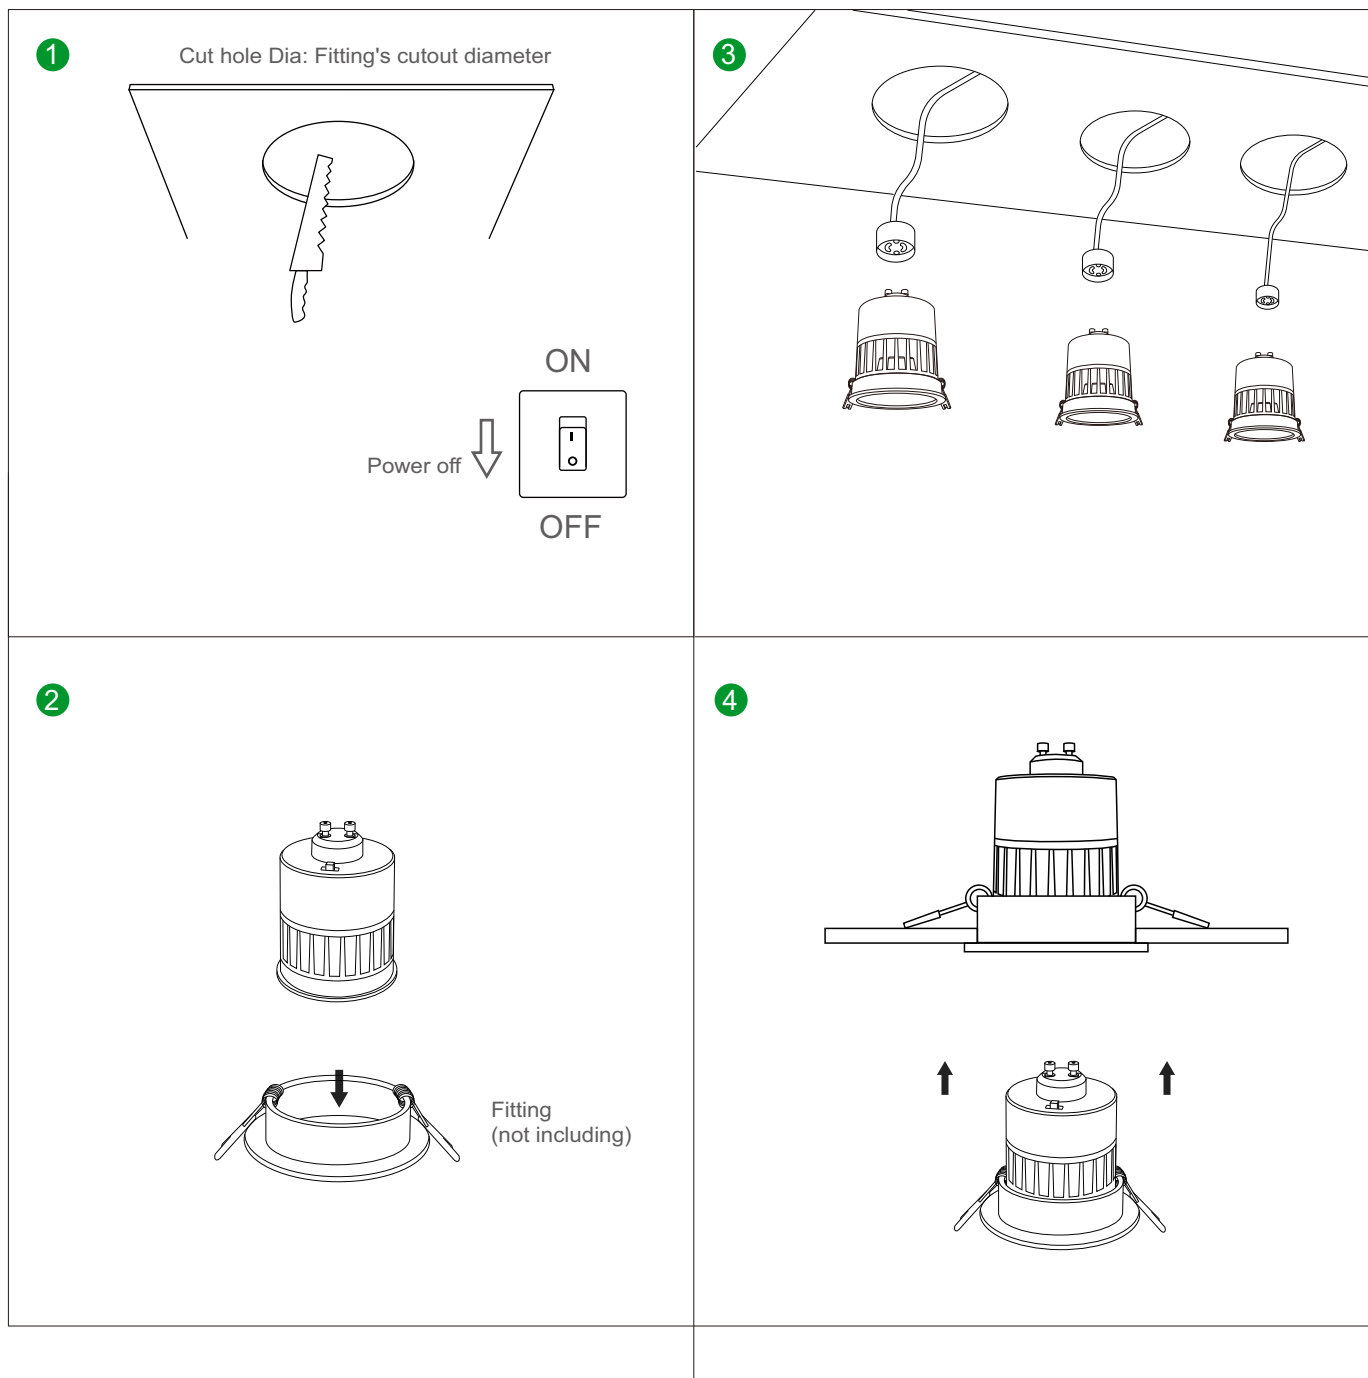

Please Note:

- * Turn off and isolate the electrical supply before connecting this fitting to the building wires.
- * Must be installed, or connected by licenced electrician.
- * The Luminaires are intended for indoor use only.

Applications :

- Hospitality applications
- Residential applications
- Of ce Buildings
- Hotels
- Shopping Malls
- Supermarkets