

DB-LWL-LB LINEAR SERIES

9 MODEL VARIANTS (DB-LWL-LB30-9W-A to DB-LWL-LB200-50W-A)

0001



SHARED SPECIFICATIONS

Input Voltage	AC85-265V
CCT	3000K / 4000K / 6000K
Finish	Black Shell
Applications	Indoor & Outdoor
Available Options	Single Color / CCT / RGB / RGBW / RGB+CCT
Light Source	COB Strip
Performance	90~100LM/W
Remarks	Type A innovation linear LED wall light; light is softer

All variants below are reproduced directly from the source technical data.

MODEL	POWER	SIZE (MM)	COMMON SPECIFICATION / FINISH
DB-LWL-LB30-9W-A	9W	300*90*40mm	AC85-265V / 3000-4000-6000K / Black Shell
DB-LWL-LB40-12W-A	12W	400*90*40mm	AC85-265V / 3000-4000-6000K / Black Shell
DB-LWL-LB60-18W-A	18W	600*90*40mm	AC85-265V / 3000-4000-6000K / Black Shell
DB-LWL-LB80-24W-A	24W	800*90*40mm	AC85-265V / 3000-4000-6000K / Black Shell
DB-LWL-LB100-30W-A	30W	1000*90*40mm	AC85-265V / 3000-4000-6000K / Black Shell
DB-LWL-LB120-36W-A	36W	1200*90*40mm	AC85-265V / 3000-4000-6000K / Black Shell
DB-LWL-LB150-40W-A	40W	1500*90*40mm	AC85-265V / 3000-4000-6000K / Black Shell
DB-LWL-LB180-45W-A	45W	1800*90*40mm	AC85-265V / 3000-4000-6000K / Black Shell
DB-LWL-LB200-50W-A	50W	2000*90*40mm	AC85-265V / 3000-4000-6000K / Black Shell

DB-LWL-A01A-6WA

0002



DIMENSIONS

Φ60*240mm

SPECIFICATIONS

Power: 6W
Volt: AC85-265V 50/60HZ
Beam Angle: up&downIP65
Lumen: 70~80LM/W Ra>80
Size: Φ60*240mm
Color temperature: WW/NW/W
Shell: Golden
Material: Aluminum Alloy

IP65

Source sheet p.2

DB-LWL-A01A-6WB

0003



DIMENSIONS

Φ60*350mm

SPECIFICATIONS

Power: 6W
Volt: AC85-265V 50/60HZ
Beam Angle: up&downIP65
Lumen: 70~80LM/W Ra>80
Size: Φ60*350mm
Color temperature: WW/NW/W
Shell: Golden
Material: Aluminum Alloy

IP65

Source sheet p.2

DB-LWL-A01B-6W

0004



DIMENSIONS

250*90*30cm

SPECIFICATIONS


Power: 6W
Volt: AC85-265V 50/60HZ
Beam Angle: 60° IP65
Lumen: 70~80LM/W Ra>80
Size: 250*90*30cm
Color temperature: WW/NW/W
Shell: Black/White
Material: Aluminum Alloy

IP65

Source sheet p.2

DB-LWL-A01B-12W

0005



DIMENSIONS

310*90*35mm

SPECIFICATIONS

Power: 12W
Volt: AC85-265V 50/60HZ
Beam Angle: 60° IP65
Lumen: 70~80LM/W Ra>80
Size: 310*90*35mm
Color temperature: WW/NW/W
Shell: Black/White
Material: Aluminum Alloy

IP65

Source sheet p.2

DB-LWL-A01B-14W

0006



DIMENSIONS

610*90*35mm

SPECIFICATIONS


Power:	14W
Volt:	AC85-265V 50/60HZ
Beam Angle:	60° IP65
Lumen:	70~80LM/W Ra>80
Size:	610*90*35mm
Color temperature:	WW/NW/W
Shell:	Black/White
Material:	Aluminum Alloy

IP65

Source sheet p.2

DB-LWL-A02A-7W

0007

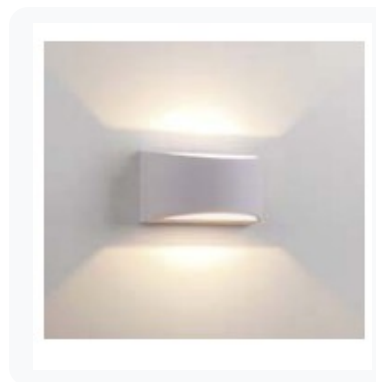

DIMENSIONS

160*100*77mm

SPECIFICATIONS

Power:	7W COB
Volt:	AC85-265V 50/60HZ
Beam Angle:	Up&Down IP65
Lumen:	70~80LM/W Ra>80
Size:	160*100*77mm
Color temperature:	WW/NW/W
Shell:	White/Black
Material:	Aluminum Alloy

IP65

Source sheet p.3

DB-LWL-A02A-S7W

0008



DIMENSIONS

160*100*77mm

SPECIFICATIONS

Power: 7W COB with PIR Sensor
Volt: AC85-265V 50/60HZ
Beam Angle: Up&Down IP65
Lumen: 70~80LM/W Ra>80
Size: 160*100*77mm
Color temperature: WW/NW/W
Shell: White/Black
Material: Aluminum Alloy

IP65

PIR SENSOR

Source sheet p.3

DB-LWL-A203IP65-B12W

0009

2 model variants in this series



SERIES SPECIFICATIONS

Power: 12/20W COB
Volt: AC85-265V Done Driver
Beam Angle: Up&Down IP65
Lumen: 70~80LM/W Ra>80
Size: 203*118*100mm
Color temperature: WW/NW/W
Shell: White/Black
Function: With on-off button
Material: Aluminum Alloy

MODEL

DIMENSION / SOURCE DETAIL

DB-LWL-A203IP65-B12W

203*118*100mm

DB-LWL-A203IP65-B20W

IP65

Source sheet p.3

DB-LWL-A203IP65-B12W

0010

2 model variants in this series



SERIES SPECIFICATIONS

Power:	12/20W COB
Volt:	AC85-265V Done Driver
Beam Angle:	Up&Down IP65
Lumen:	70~80LM/W Ra>80
Size:	203*118*100mm
Color temperature:	WW/NW/W
Shell:	White/Black
Function:	With PIR sensor
Material:	Aluminum Alloy

MODEL

DIMENSION / SOURCE DETAIL

DB-LWL-A203IP65-B12W

203*118*100mm

DB-LWL-A203IP65-B20W


IP65

PIR SENSOR

Source sheet p.3

DB-LWL-A03A-6W

0011

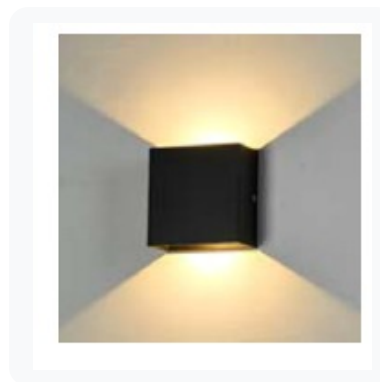

DIMENSIONS

100*100*50MM

SPECIFICATIONS

Power:	2*3W COB
Volt:	AC85-265V 50/60HZ
Beam Angle:	up&down IP65
Lumen:	70~80LM/W Ra>80
Size:	100*100*50MM
Color temperature:	WW/NW/W
Shell:	White/Black
Material:	Aluminum Alloy

IP65

Source sheet p.3

DB-LWL-A03A-12W

0012



DIMENSIONS

100*100*50MM

SPECIFICATIONS


Power:	2*6W COB
Volt:	AC85-265V 50/60HZ
Beam Angle:	up&down IP65
Lumen:	70~80LM/W Ra>80
Size:	100*100*50MM
Color temperature:	WW/NW/W
Shell:	White/Black
Material:	Aluminum Alloy

IP65

Source sheet p.4

DB-LWL-A03A-7WS

0013

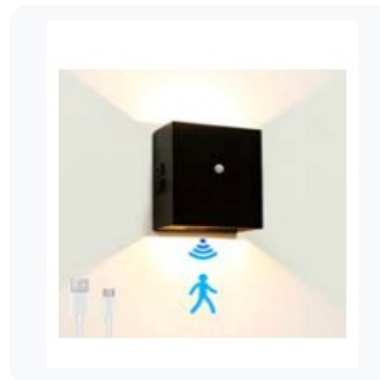

SPECIFICATIONS

PIR SENSOR

EMERGENCY

Source sheet p.4

DB-LWL-A04A-3W

0014



DIMENSIONS

100*100*80mm

SPECIFICATIONS


Power: 3W
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 100*100*80mm
Color temperature: WW/W/R/G/B/Y/P
Shell: Black/ White
Material: Aluminum Alloy

IP65

Source sheet p.4

DB-LWL-A04A-5W

0015

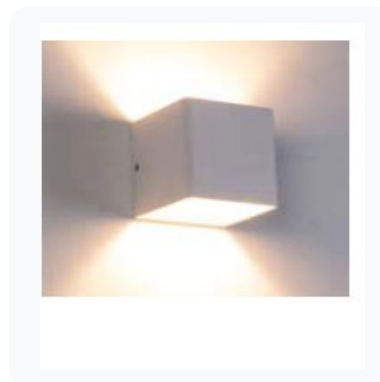

DIMENSIONS

100*100*80mm

SPECIFICATIONS

Power: 5W
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 100*100*80mm
Color temperature: WW/W/R/G/B/Y/P
Shell: Black/ White
Material: Aluminum Alloy

IP65

Source sheet p.4

DB-LWL-A04A-7WS

0016

SPECIFICATIONS



PIR SENSOR

EMERGENCY

Source sheet p.4

DB-LWL-A04B200-7W

0017

DIMENSIONS

200*100*80MM

SPECIFICATIONS

Power: 7W
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 200*100*80MM
Color temperature: WW/NW/W
Shell: Black/ White
Material: Aluminum Alloy



IP65

Source sheet p.5

DB-LWL-A04B300-7W

0018



DIMENSIONS

300*100*80MM

SPECIFICATIONS

Power: 7W
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 300*100*80MM
Color temperature: WW/NW/W
Shell: Black/ White
Material: Aluminum Alloy

IP65

Source sheet p.5

DB-LWL-A04B370-12W

0019



DIMENSIONS

370*100*80MM

SPECIFICATIONS


Power: 12W
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 370*100*80MM
Color temperature: WW/NW/W
Shell: Black/ White
Material: Aluminum Alloy

IP65

Source sheet p.5

DB-LWL-A04C-5W

0020

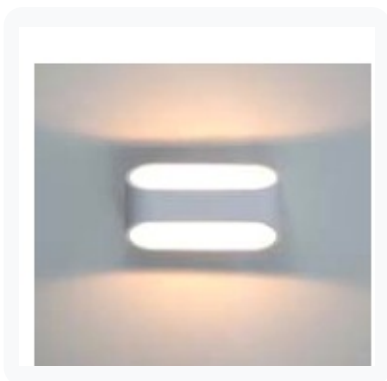

DIMENSIONS

140*130*60mm

SPECIFICATIONS


Power:	5W
Volt:	AC85-265V 50/60HZ
Beam Angle:	360° IP65
Lumen:	70~80LM/W Ra>80
Size:	140*130*60mm
Color:	WW/W
Shell:	Black/White
Material:	Aluminum Alloy

IP65

Source sheet p.5

DB-LWL-A04DIP65-S7WM

0021

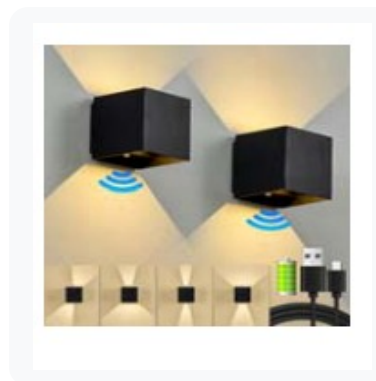

DIMENSIONS

1. Power: 2*3.5W 2. Battery: 4000mAh
3. Beam Angle: 0~180° IP65 4. Size: ...

SPECIFICATIONS

IP65

PIR SENSOR

EMERGENCY

Source sheet p.5

DB-LWL-A05A-5W

0022



DIMENSIONS

65*90*78(H)Φ60mm

SPECIFICATIONS


Power: 5W COB
Volt: AC85-265V 50/60HZ
Beam Angle: 60° IP65
Lumen: 70~80LM/W Ra>80
Size: 65*90*78(H)Φ60mm
Color temperature: WW/NW/W
Shell: White/Black
Material: Aluminum Alloy

IP65

Source sheet p.6

DB-LWL-AD60-6W

0023

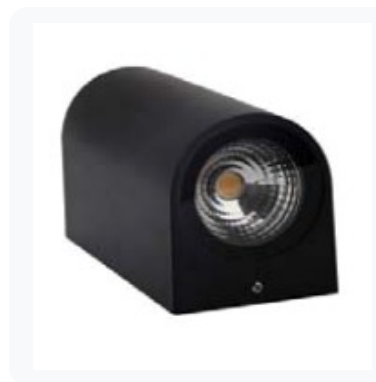

DIMENSIONS

68*150*80(H)Φ60mm

SPECIFICATIONS

Power: 2*3W COB
Volt: AC85-265V 50/60HZ
Beam Angle: 60° Up&Down IP65
Lumen: 70~80LM/W Ra>80
Size: 68*150*80(H)Φ60mm
Color temperature: WW/NW/W
Shell: White/Black
Material: Aluminum Alloy

IP65

Source sheet p.6

DB-LWL-AS60-S5W

0024



DIMENSIONS

67*80*80(H)Φ60mm

SPECIFICATIONS


Power: 5W COB
Volt: AC85-265V 50/60HZ
Beam Angle: 60° IP65
Lumen: 70~80LM/W Ra>80
Size: 67*80*80(H)Φ60mm
Color temperature: WW/NW/W
Shell: White/Black
Material: Aluminum Alloy

IP65

Source sheet p.6

DB-LWL-AS60-D10W

0025

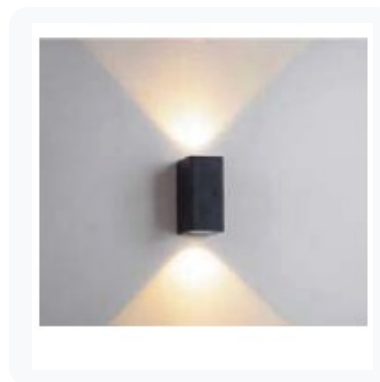

DIMENSIONS

67*80*150(H)Φ60mm

SPECIFICATIONS

Power: 2*5W COB
Volt: AC85-265V 50/60HZ
Beam Angle: 60° IP65
Lumen: 70~80LM/W Ra>80
Size: 67*80*150(H)Φ60mm
Color temperature: WW/NW/W
Shell: White/Black
Material: Aluminum Alloy

IP65

Source sheet p.6

DB-LWL-A06AR-3W

0026



SPECIFICATIONS

Power: 3W Cree Chip
Volt: AC85-265V Brand Driver
Lumen: 60~70LM/W
Color temperature: WW/NW
Material: Aluminum IP65
Function: Shine part is Rotatable
Shell: Silver/White/black/Golden /Coffe
Material: Aluminum Alloy

IP65

ROTATABLE

Source sheet p.6

DB-LWL-A06AS-3W

0027



SPECIFICATIONS

Power: 3W Cree Chip
Volt: AC85-265V Brand Driver
Lumen: 60~70LM/W
Color temperature: WW/NW
Material: Aluminum IP65
Function: Shine part is Rotatable
Shell: Silver/White/black/Golden /Coffe
Material: Aluminum Alloy

IP65

ROTATABLE

Source sheet p.7

KD-LWL-ALK40-3W



SPECIFICATIONS

Power:	3W Cree Chip
Volt:	AC85-265V Brand Driver
Lumen:	60~70LM/W
Color temperature:	WW/NW
Material:	Aluminum IP65
Function:	Shine part is Rotatable
Shell:	Silver/Golden /Coffe
Material:	Aluminum Alloy


IP65

ROTATABLE

Source sheet p.7

DB-LWL-A06A-3W-A

0028

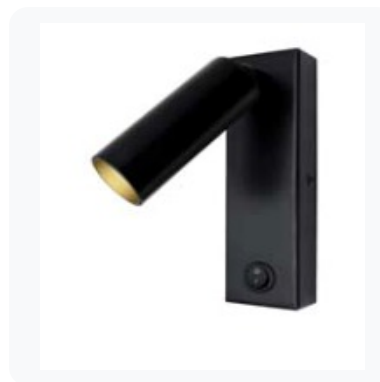

DIMENSIONS

Base 55*180mm,Φ40*100mm

SPECIFICATIONS


Power:	3W Bedside lamp
Volt:	AC85-265V 50/60HZ
Beam Angle:	30° IP65
Lumen:	60~70LM/W Ra>80
Size:	Base 55*180mm,Φ40*100mm
Color temperature:	WW/NW/W
Shell:	Black/white
Material:	Aluminum+Steel
the spot can be rotary,with on-off key	

IP65

Source sheet p.7

DB-LWL-A06A-3W-B

0029

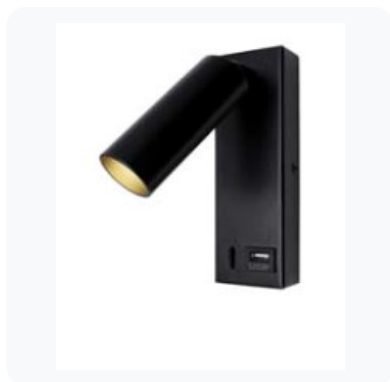

DIMENSIONS

Base 55*180mm,Φ40*100mm

SPECIFICATIONS

Power: 3W Bedside lamp
Volt: AC85-265V 50/60HZ
Beam Angle: 30° IP65
Lumen: 60~70LM/W Ra>80
Size: Base
55*180mm,Φ40*100mm
Color temperature: WW/NW/W
Shell: Black/white/bronze
Material: Aluminum+Steel
the spot can be rotary,with on-off key and
Rechargeable USB


IP65

USB

Source sheet p.7

DB-LWL-A06C-3W

0030

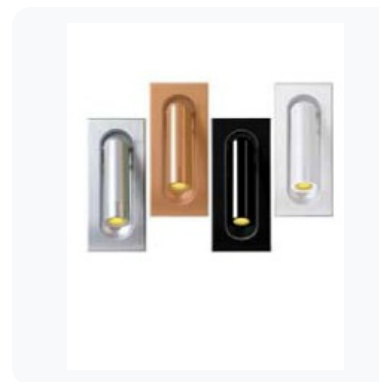

DIMENSIONS

170*70*60mm Open

SPECIFICATIONS

Power: 3W Bedside lamp
Volt: AC85-265V 50/60HZ
Beam Angle: 30° IP65
Lumen: 60~70LM/W Ra>80
Size: 170*70*60mm Open
hole:150*50mm
Color temperature: WW/NW/W
Shell: Black/white/Golden/Silver
Material: Aluminum Alloy,
the spot can be rotary,with on-off key

IP65

Source sheet p.7

DB-LWL-A08A-S12W

0031



DIMENSIONS

145*145*50mm

SPECIFICATIONS

Power: 4+8W
Volt: AC85-265V 50/60HZ
Beam Angle: 350° IP65
Lumen: 70~80LM/W Ra>80
Size: 145*145*50mm
Color temperature: WW/NW/W
Shell: White/Black
Material: Aluminum Alloy
the spot can be rotated, 2pcs on-off keys

IP65

ROTATABLE

Source sheet p.8

DB-LWL-A08A-S12W-USB

0032



DIMENSIONS

145*145*50mm

SPECIFICATIONS

Power: 4+8W
Volt: AC85-265V 50/60HZ
Beam Angle: 350° IP65
Lumen: 70~80LM/W Ra>80
Size: 145*145*50mm
Color temperature: WW/NW/W
Shell: White/Black
Material: Aluminum Alloy
the spot can be rotated, 2pcs on-off keys, with USB, without charging cable

IP65


ROTATABLE

USB

Source sheet p.8

DB-LWL-A08A-R12W

0033

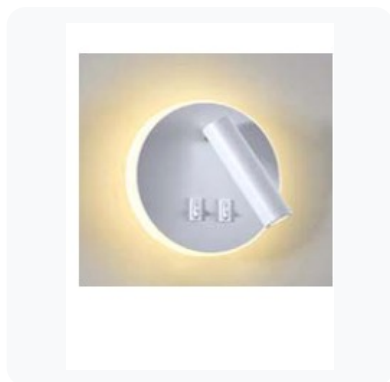

DIMENSIONS

Φ145*50mm

SPECIFICATIONS

Power: 4+8W
Volt: AC85-265V 50/60HZ
Beam Angle: 360° IP65
Lumen: 70~80LM/W Ra>80
Size: Φ145*50mm
Color temperature: WW/NW/W
Shell: White/Black
Material: Aluminum Alloy
the spot can be rotated, 2pcs on-off keys


IP65

ROTATABLE

Source sheet p.8

DB-LWL-A08A-R12W-USB

0034

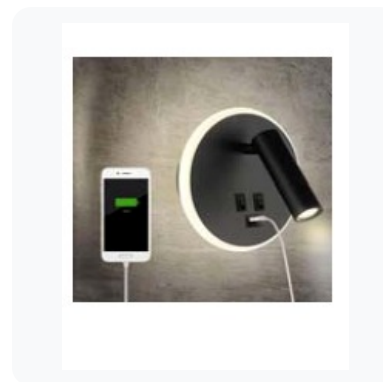

DIMENSIONS

Φ145*50mm

SPECIFICATIONS

Power: 4+8W
Volt: AC85-265V 50/60HZ
Beam Angle: 360° IP65
Lumen: 70~80LM/W Ra>80
Size: Φ145*50mm
Color temperature: WW/NW/W
Shell: White/Black
Material: Aluminum Alloy
the spot can be rotated, 2pcs on-off keys, with USB, without charging cable

IP65


ROTATABLE

USB

Source sheet p.8

DB-LWLA08A-L10W

0035

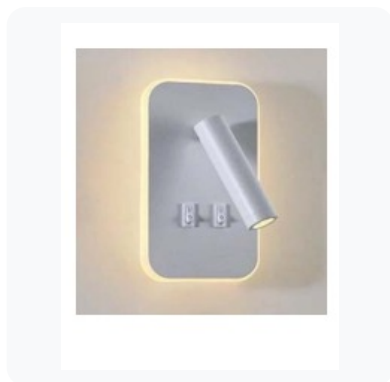

DIMENSIONS

107*187*30mm

SPECIFICATIONS

Power: 3+7W
Volt: AC85-265V 50/60HZ
Beam Angle: 350° IP65
Lumen: 70~80LM/W Ra>80
Size: 107*187*30mm
Color temperature: WW/NW/W
Shell: White/Black
Material: Aluminum Alloy
the spot can be rotated, 2pcs on-off keys


IP65

ROTATABLE

Source sheet p.9

DB-LWLA08A-L10W-USB

0036

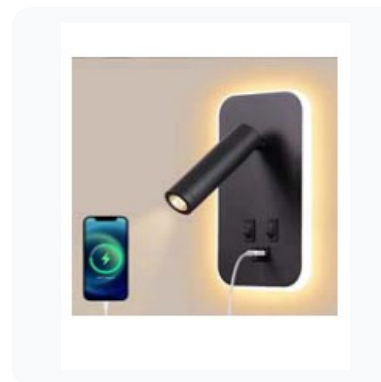

DIMENSIONS

107*187*30mm

SPECIFICATIONS

Power: 3+7W
Volt: AC85-265V 50/60HZ
Beam Angle: 350° IP65
Lumen: 70~80LM/W Ra>80
Size: 107*187*30mm
Color temperature: WW/NW/W
Shell: White/Black
Material: Aluminum Alloy
the spot can be rotated, 2pcs on-off keys, with USB, without charging cable

IP65


ROTATABLE

USB

Source sheet p.9

DB-LWLA08A-9+3W

0037

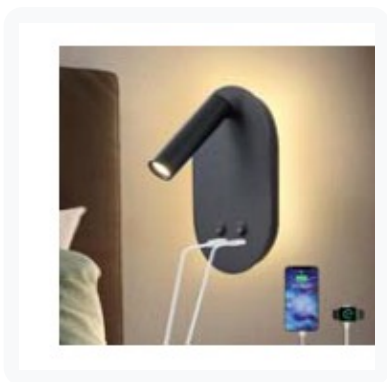

SPECIFICATIONS

Power: 9+3W Cree Chip
Volt: AC85-265V Done Driver
Lumen: 60~70LM/W
Color temperature: WW
Material: Aluminum IP65
Function: USB C+A charging ports and 2pcs on-off keys

IP65

USB

Source sheet p.9

DB-LWLA08B-7+3W

0038



SPECIFICATIONS

Power: 7+3W
Volt: AC85-265V
Lumen: 60~70LM/W
Color temperature: WW
Material: Aluminum IP65
Function: 1pc 5V USB Charger port + 2pcs on-Off keys+ wireless Charger

IP65

USB

WIRELESS CHARGER

Source sheet p.9

DB-LWLA08C-7+3W

0039



DIMENSIONS

300*120*31mm

SPECIFICATIONS

Power: 7+3W
Volt: AC85-265V
Lumen: 60~70LM/W
Color temperature: WW
Size: 300*120*31mm
Material: Aluminum IP65
Function: 1pc 5V USB port and 2pcs on-off keys

IP65

USB

Source sheet p.9

DB-LWLA08D-7+3W

0040



DIMENSIONS

300*120*36mm

SPECIFICATIONS

Power: 7+3W
Volt: AC85-265V
Lumen: 60~70LM/W
Color temperature: WW
Size: 300*120*36mm
Material: Aluminum IP65
Function: 1pc 5V USB port and 2pcs on-off keys

IP65

USB

Source sheet p.10

DB-LWLA08E-5+3W

0041



DIMENSIONS

260*100*30mm

SPECIFICATIONS

Power: 5+3W
Volt: AC85-265V
Lumen: 60~70LM/W
Color temperature: WW
Size: 260*100*30mm
Material: Aluminum IP65
Function: 1pc 5V USB port and 2pcs on-off keys

IP65

USB

Source sheet p.10

DB-LWLA08F-5+3W

0042



SPECIFICATIONS

Power: 5+3W
Volt: AC85-265V Done Driver
Lumen: 60~70LM/W
Color temperature: WW
Material: Aluminum IP65
Function: 1pc 5V USB port and 2pcs on-off keys


IP65

USB

Source sheet p.10

DB-LWLA08G-3+3W

0043

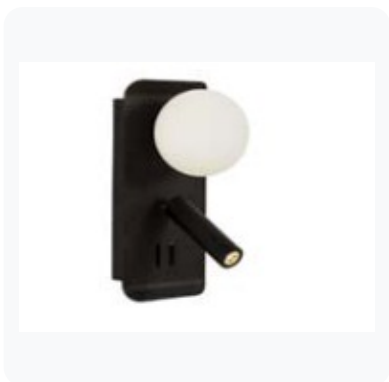

SPECIFICATIONS

Power:	3+3W
Volt:	AC85-265V Done Driver
Lumen:	60~70LM/W
Color temperature:	WW
Material:	Aluminum IP65
Function:	1pc 5V USB port and 2pcs on-off keys


IP65

USB

Source sheet p.10

DB-LWLA08H-3W

0044

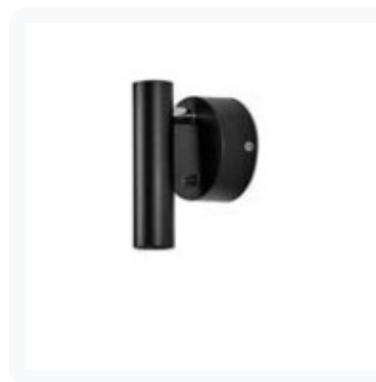

SPECIFICATIONS

Power:	3W
Volt:	AC85-265V 50/60HZ
Beam Angle:	30°
Lumen:	70~80LM/W Ra>80
Color temperature:	WW/W
Shell:	Black/White
Material:	Steel+Aluminum
the spot can be rotary, With press on-off key	

Source sheet p.10

DB-LWL-A100R-3WA

0045



DIMENSIONS

Φ100*H30mm

SPECIFICATIONS

Power: 3W
Volt: AC85-265V 50/60HZ
Beam Angle: 30°
Lumen: 70~80LM/W Ra>80
Size: Φ100*H30mm
Color temperature: WW/W
Shell: Black/White
Material: Steel+Aluminum
the spot can be rotary, With press on-off key

Source sheet p.10

DB-LWL-A09-5WR

0046



DIMENSIONS

Φ161*52mm

SPECIFICATIONS


Power: 5W SMD Done Driver
Volt: AC85-265V 50/60HZ
The top layer is rotatable IP65
Lumen: 280~300LM
Size(R): Φ161*52mm
Color temperature: WW/NW/W
Shell: White/Black
Material: PMMA+Steel

IP65

Source sheet p.11

DB-LWL-A09-9WR

0047

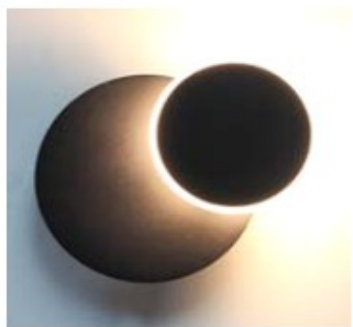

DIMENSIONS

Φ235*55mm

SPECIFICATIONS

Power: 9W SMD Done Driver
Volt: AC85-265V 50/60HZ
The top layer is rotatable IP65
Lumen: 480~540LM
Size(R): Φ235*55mm
Color temperature: WW/NW/W
Shell: White/Black
Material: PMMA+Steel

IP65

Source sheet p.11

DB-LWL-A09-5WS

0048



DIMENSIONS

161*161*52mm

SPECIFICATIONS


Power: 5W SMD Done Driver
Volt: AC85-265V 50/60HZ
The top layer is rotatable IP65
Lumen: 280~300LM
Size(S): 161*161*52mm
Color temperature: WW/NW/W
Shell: White/Black
Material: PMMA+Steel

IP65

Source sheet p.11

DB-LWL-A09-9WS

0049



DIMENSIONS

235*235*55mm

SPECIFICATIONS

Power: 9W SMD Done Driver
Volt: AC85-265V 50/60HZ
The top layer is rotatable IP65
Lumen: 480~540LM
Size(S): 235*235*55mm
Color temperature: WW/NW/W
Shell: White/Black
Material: PMMA+Steel

IP65

Source sheet p.11

DB-LWL-A10-3W

0050



DIMENSIONS

160*80*50mm

SPECIFICATIONS

Power: 3W
Volt: AC85-265V 50/60HZ
Beam angle: up&down IP65
Lumen: 70-80LM/W
Size: 160*80*50mm
Color temperature: WW/NW/W
Shell: White
Material: Aluminum+PMMA

IP65

Source sheet p.11

DB-LWL-A10-4W

0051



DIMENSIONS

200*80*50mm

SPECIFICATIONS


Power: 4W
Volt: AC85-265V 50/60HZ
Beam angle: up&down IP65
Lumen: 70-80LM/W
Size: 200*80*50mm
Color temperature: WW/NW/W
Shell: White
Material: Aluminum+PMMA

IP65

Source sheet p.12

DB-LWL-A10-8W

0052

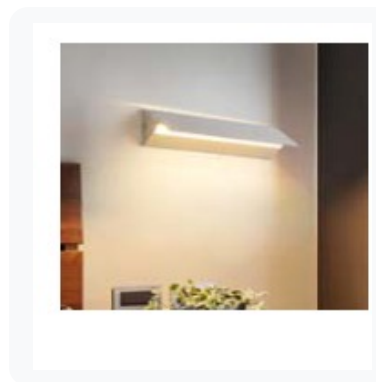

DIMENSIONS

460*80*50mm

SPECIFICATIONS


Power: 8W
Volt: AC85-265V 50/60HZ
Beam angle: up&down IP65
Lumen: 70-80LM/W
Size: 460*80*50mm
Color temperature: WW/NW/W
Shell: White
Material: Aluminum+PMMA

IP65

Source sheet p.12

DB-LWL-A11A-12WR

0053

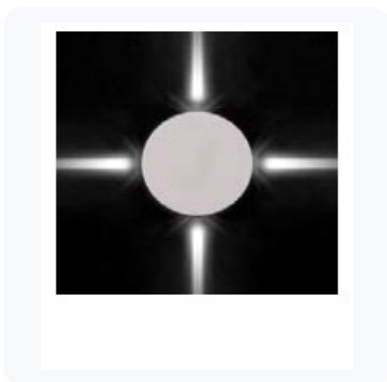

DIMENSIONS

Φ140*45(H)mm

SPECIFICATIONS


Power: 4*3W 4Faces
Volt: AC85-265V 50/60HZ
Beam Angle: 5° IP65
Lumen: 50-60LM/W
Size(R): Φ140*45(H)mm
Color.T: WW/W
Shell: Black Base+White Cover
Material: Alu Alloy
installing: Surface

IP65

Source sheet p.12

DB-LWL-A11A-12WS

0054

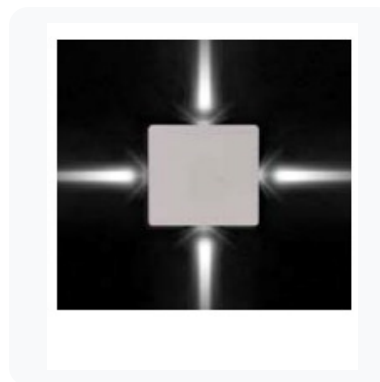

DIMENSIONS

140*140*45(H)mm

SPECIFICATIONS

Power: 4*3W 4Faces
Volt: AC85-265V 50/60HZ
Beam Angle: 5° IP65
Lumen: 50-60LM/W
Size(S): 140*140*45(H)mm
Color.T: WW/W
Shell: Black Base+White Cover
Material: Alu Alloy
installing: Surface

IP65

Source sheet p.12

DB-LWL-A11B-12WR

0055



DIMENSIONS

145*43mm

SPECIFICATIONS

Power: 4*3W
Volt: AC85-265V 50/60HZ
Beam Angle: 5° IP65
Lumen: 70-80LM/W
Size: Φ145*43mm
Color.T: WW/W
Shell: Black Base+White Cover
Material: Alu Alloy

IP65

Source sheet p.12

DB-LWL-A12A-6W

0056



DIMENSIONS

180*60*30mm

SPECIFICATIONS

Power: 6*1W
Volt: AC85-265V 50/60HZ
Lumen: 780~840LM/W
Size: 180*60*30mm
Color temperature: WW/NW/W
Shell: Silver
Material: PMMA+Alu

Source sheet p.13

DB-LWL-A12A-6W

0057



DIMENSIONS

180*60*30mm

SPECIFICATIONS

Power: 6*1W
Volt: AC85-265V 50/60HZ
Lumen: 780~840LM/W
Size: 180*60*30mm
Color temperature: WW/NW/W
Shell: Silver
Material: PMMA+Alu

Source sheet p.13

DB-LWL-A12A-8W

0058



DIMENSIONS

190*60*30mm

SPECIFICATIONS

Power: 8*1W
Volt: AC85-265V 50/60HZ
Lumen: 780~840LM/W
Size: 190*60*30mm
Color temperature: WW/NW/W
Shell: Silver
Material: PMMA+Alu

Source sheet p.13

DB-LWL-A12A-8W

0059



DIMENSIONS

190*60*30mm

SPECIFICATIONS

Power: 8*1W
Volt: AC85-265V 50/60HZ
Lumen: 780~840LM/W
Size: 190*60*30mm
Color temperature: WW/NW/W
Shell: Silver
Material: PMMA+Alu

Source sheet p.13

DB-LWL-PS270-6W

0060



DIMENSIONS

270*100*41mm

SPECIFICATIONS

Power: 6W
Volt: AC85-265V 50/60HZ
Beam Angle: 120° IP65
Lumen: 280~300LM
Size: 270*100*41mm
Color temperature: WW/NW/W
Shell: Silver/Black/Gold
Material: PMMA(Acrylic)

IP65

Source sheet p.13

DB-LWL-PR270-6W

0061



DIMENSIONS

270*100*41mm

SPECIFICATIONS

Power: 6W
Volt: AC85-265V 50/60HZ
Beam Angle: 120° IP65
Lumen: 280~300LM
Size: 270*100*41mm
Color temperature: WW/NW/W
Shell: Silver/Black/Gold
Material: PMMA(Acrylic)

IP65

Source sheet p.14

DB-LWL-TS200-12WS

0062



DIMENSIONS

200*200*40mm

SPECIFICATIONS

Power: 12W SMD
Volt: AC85-265V 50/60HZ
Lumen: 50~60LM/W
Size(S): 200*200*40mm
Color temperature: WW/NW/W
Shell: White/Black
Function: Cover is Touch switch
Material: PMMA+Steel

Source sheet p.14

DB-LWL-TS300-20WS

0063



DIMENSIONS

300*300*40mm

SPECIFICATIONS

Power: 20W SMD
Volt: AC85-265V 50/60HZ
Lumen: 50~60LM/W
Size(S): 300*300*40mm
Color temperature: WW/NW/W
Shell: White/Black
Function: Cover is Touch switch
Material: PMMA+Steel

Source sheet p.14

DB-LWL-TS200-12WR

0064



DIMENSIONS

Φ200*40mm

SPECIFICATIONS

Power: 12W SMD
Volt: AC85-265V 50/60HZ
Lumen: 50~60LM/W
Size(R): Φ200*40mm
Color temperature: WW/NW/W
Shell: White/Black
Function: Cover is Touch switch
Material: PMMA+Steel

Source sheet p.14

DB-LWL-TS300-20WR

0065



DIMENSIONS

Φ300*40mm

SPECIFICATIONS

Power: 20W SMD
Volt: AC85-265V 50/60HZ
Lumen: 50~60LM/W
Size(R): Φ300*40mm
Color temperature: WW/NW/W
Shell: White/Black
Function: Cover is Touch switch
Material: PMMA+Steel

Source sheet p.14

DB-LWL-TS200-12WH

0066



DIMENSIONS

Φ200*40mm

SPECIFICATIONS

Power: 12W SMD
Volt: AC85-265V 50/60HZ
Lumen: 50~60LM/W
Size(H): Φ200*40mm
Color temperature: WW/NW/W
Shell: White/Black
Function: Cover is Touch switch
Material: PMMA+Steel

Source sheet p.15

DB-LWL-TS300-20WH

0067



DIMENSIONS

Φ300*40mm

SPECIFICATIONS

Power:	20W SMD
Volt:	AC85-265V 50/60HZ
Lumen:	50~60LM/W
Size(H):	Φ300*40mm
Color temperature:	WW/NW/W
Shell:	White/Black
Function:	Cover is Touch switch
Material:	PMMA+Steel

Source sheet p.15

DB-LWL-A01AIP65-6W

0068

2 model variants in this series



SERIES SPECIFICATIONS

Power: 2*3W Or 2*6W
Volt: AC85-265V Done Driver
Beam Angle: Up&Down IP65
Lumen: 60~70LM/W Ra>80
Size: 110*175*60(H)MM
Color temperature: WW/NW/W
Shell: Black/White
Material: Aluminum Alloy

MODEL

DIMENSION / SOURCE DETAIL

DB-LWL-A01AIP65-6W

110*175*60(H)MM

DB-LWL-A01AIP65-12W


IP65

Source sheet p.15

DB-LWL-A01AIP65-6W-PIR

0069

2 model variants in this series



SERIES SPECIFICATIONS

Power: 2*3W Or 2*6W PIR
Volt: AC85-265V Done Driver
Beam Angle: Up&Down IP65
Lumen: 60~70LM/W Ra>80
Size: 110*175*60(H)MM
Color temperature: WW/NW/W
Shell: Black/White
Material: Aluminum Alloy

MODEL

DIMENSION / SOURCE DETAIL

DB-LWL-A01AIP65-6W-PIR

110*175*60(H)MM

DB-LWL-A01AIP65-12W-PIR

IP65

PIR SENSOR

Source sheet p.15

DB-LWL-A01BIP65-3W

0070



DIMENSIONS

80*83*63mm

SPECIFICATIONS

Power: 3W COB
Volt: AC100-240V 50/60HZ
Beam Angle: 120° IP65
Lumen: 80~90LM/W Ra>80
Size: 80*83*63mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.15

DB-LWL-A01BIP65-6W

0071



DIMENSIONS

80*142*63mm

SPECIFICATIONS

Power: 2*3W COB
Volt: AC100-240V 50/60HZ
Beam Angle: 120° IP65
Lumen: 80~90LM/W Ra>80
Size: 80*142*63mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.16

DB-LWL-A02AIP65-12W

0072



DIMENSIONS

250*90*80mm

SPECIFICATIONS

Power: 5W*2+2W
Volt: AC85-265V 50/60HZ
Beam Angle: u&down IP65
Lumen: 70~80LM/W Ra>80
Size: 250*90*80mm
Color temperature: WW/NW/W
Shell: Black/White
Material: Aluminum Alloy

IP65

Source sheet p.16

DB-LWL-A02AIP65-12W

0073



DIMENSIONS

250*90*80mm

SPECIFICATIONS


Power: 5W*2+2W
Volt: AC85-265V 50/60HZ
Beam Angle: u&down IP65
Lumen: 70~80LM/W Ra>80
Size: 250*90*80mm
Color temperature: WW/NW/W
Shell: Black+Gold/White+Gold
Material: Aluminum Alloy

IP65

Source sheet p.16

DB-LWL-A02CIP65-4W

0074

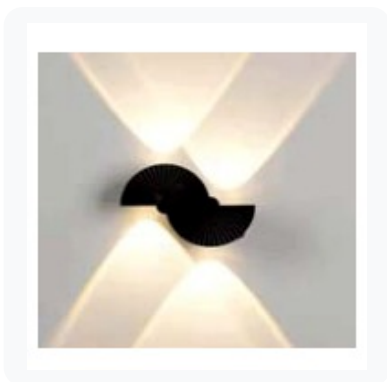

DIMENSIONS

150*100*44mm

SPECIFICATIONS

Power: 4*1W
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 150*100*44mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.16

DB-LWL-A03AIP65-8W

0075

2 model variants in this series



SERIES SPECIFICATIONS

Power: 3+3+2W
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 205*70*50mm
Color temperature: WW/NW/W
Material: Aluminum Alloy

MODEL

DIMENSION / SOURCE DETAIL

DB-LWL-A03AIP65-8W

205*70*50mm

DB-LWL-A03AIP65-8W

IP65

Source sheet p.16

DB-LWL-A03CIP65-6W

0076



DIMENSIONS

Φ180*80MM

SPECIFICATIONS


Power: 6W
Volt: AC85-265V 50/60HZ
Beam Angle: 60° IP65
Lumen: 50~60LM/W Ra>80
Size: Φ180*80MM
Color: WW/NW/W
Shell: Black+Gold/White+Gold
Material: Aluminum

IP65

Source sheet p.17

DB-LWL-A03DIP65-6W

0077

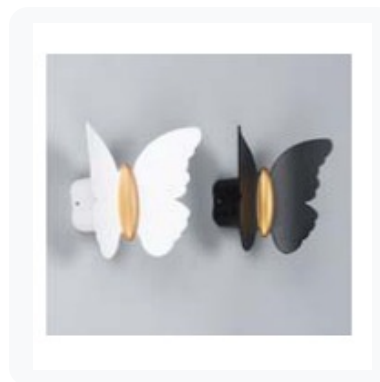

DIMENSIONS

150*150*70MM

SPECIFICATIONS


Power: 2*3W COB
Volt: AC85-265V 50/60HZ
Beam Angle: 180° IP65
Lumen: 50~60LM/W Ra>80
Size: 150*150*70MM
Color: WW/NW/W
Shell: Black/White
Material: Aluminum

IP65

Source sheet p.17

DB-LWL-A03EIP65-12WR

0078



DIMENSIONS

Φ150*50mm

SPECIFICATIONS


Power:	12W
Volt:	AC85-265V 50/60HZ
Beam Angle:	360° IP65
Lumen:	50~60LM/W Ra>80
Size:	Φ150*50mm
Color temperature:	WW/NW/W
Shell:	Black/White
Material:	Alu+PMMA

IP65

Source sheet p.17

DB-LWL-A03EIP65-12WS

0079



DIMENSIONS

150*150*50mm

SPECIFICATIONS


Power:	12W
Volt:	AC85-265V 50/60HZ
Beam Angle:	360° IP65
Lumen:	50~60LM/W Ra>80
Size:	150*150*50mm
Color temperature:	WW/NW/W
Shell:	Black/White
Material:	Alu+PMMA

IP65

Source sheet p.17

DB-LWL-A03FRIP65-6W

0080

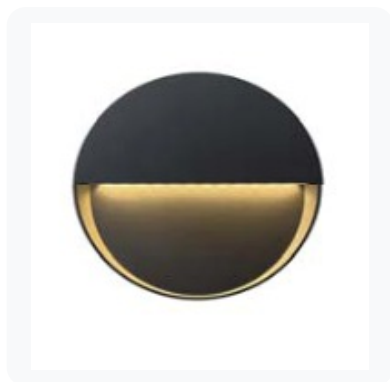

DIMENSIONS

117*117*33mm

SPECIFICATIONS


Power: 6W Done Driver
Volt: AC85-265V 50/60HZ
Beam Angle: 90° IP65
Lumen: 50~60LM/W Ra>80
Size: 117*117*33mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.17

DB-LWL-A03FRIP65-9W

0081

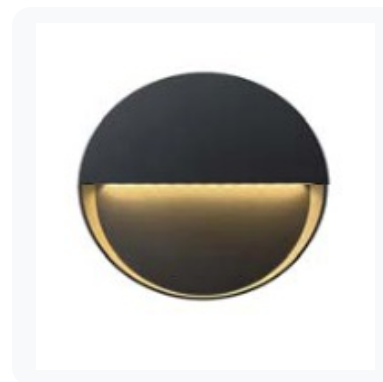

DIMENSIONS

150*150*30mm

SPECIFICATIONS

Power: 9W Done Driver
Volt: AC85-265V 50/60HZ
Beam Angle: 90° IP65
Lumen: 50~60LM/W Ra>80
Size: 150*150*30mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.18

DB-LWL-A03FSIP65-6W

0082



DIMENSIONS

117*117*33mm

SPECIFICATIONS

Power: 6W
Volt: AC85-265V 50/60HZ
Beam Angle: 90° IP65
Lumen: 50~60LM/W Ra>80
Size: 117*117*33mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.18

DB-LWL-A03FSIP65-12W

0083



DIMENSIONS

200*200*33mm

SPECIFICATIONS

Power: 12W
Volt: AC85-265V 50/60HZ
Beam Angle: 90° IP65
Lumen: 50~60LM/W Ra>80
Size: 200*200*33mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.18

DB-LWL-A03GIP65-6W

0084



DIMENSIONS

Φ160*35mm

SPECIFICATIONS


Power: 2*3W
Volt: AC85-265V 50/60HZ
Beam Angle: 2face IP65
Lumen: 80~90LM/W Ra>80
Size: Φ160*35mm
Color temperature: WW/NW/W
Shell: Black
Material: Alu+PMMA

IP65

Source sheet p.18

DB-LWL-A03HIP65-6W

0085

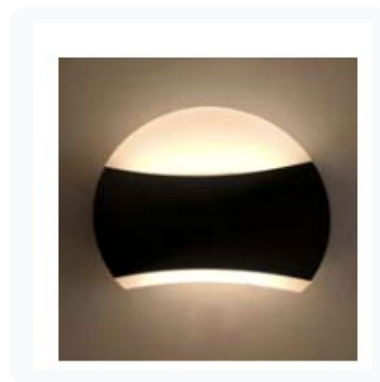

DIMENSIONS

Φ160*35mm

SPECIFICATIONS

Power: 2*3W
Volt: AC85-265V 50/60HZ
Beam Angle: 2face IP65
Lumen: 80~90LM/W Ra>80
Size: Φ160*35mm
Color temperature: WW/NW/W
Shell: Black
Material: Alu+PMMA

IP65

Source sheet p.18

DB-LWL-A04AIP65-18W

0086



DIMENSIONS

Φ200*45mm

SPECIFICATIONS


Power: 18W
Volt: AC85-265V 50/60HZ
Beam Angle: 360° IP65
Lumen: 70~80LM/W Ra>80
Size: Φ200*45mm
Color temperature: WW/NW/W
Shell: Black
Material: Alu+PMMA

IP65

Source sheet p.19

DB-LWL-A04BIP65-18W

0087

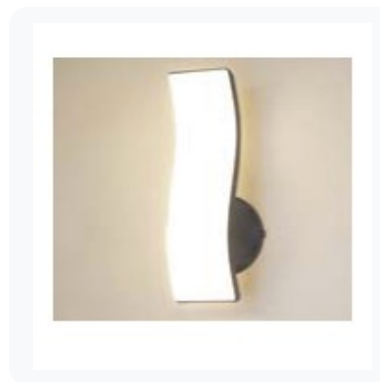

DIMENSIONS

305*120*85mm

SPECIFICATIONS

Power: 18W
Volt: AC85-265V 50/60HZ
Beam Angle: 360° IP65
Lumen: 70~80LM/W Ra>80
Size: 305*120*85mm
Color temperature: WW/NW/W
Shell: Black/White
Material: PMMA

IP65

Source sheet p.19

DB-LWL-A04CIP65-18W

0088



DIMENSIONS

230*130*50mm

SPECIFICATIONS

Power: 18W
Volt: AC85-265V 50/60HZ
Beam Angle: 360° IP65
Lumen: 70~80LM/W Ra>80
Size: 230*130*50mm
Color temperature: WW/NW/W
Shell: Black/White
Material: Alu+PMMA

IP65

Source sheet p.19

DB-LWL-A04DIP65-18W

0089



DIMENSIONS

235*120*95mm

SPECIFICATIONS

Power: 18W
Volt: AC85-265V 50/60HZ
Beam Angle: 120° IP65
Lumen: 70~80LM/W Ra>80
Size: 235*120*95mm
Color temperature: WW/NW/W
Shell: Black/White
Material: Alu+PMMA

IP65

Source sheet p.19

DB-LWL-A04EIP65-18W

0090



DIMENSIONS

235*120*96mm

SPECIFICATIONS

Power:	18W
Volt:	AC85-265V 50/60HZ
Beam Angle:	120° IP65
Lumen:	70~80LM/W Ra>80
Size:	235*120*95mm
Color temperature:	WW/NW/W
Shell:	Black/White
Material:	Alu+PMMA

IP65

Source sheet p.19

DB-LWL-A04FIP65-18W

0091



DIMENSIONS

235*120*97mm

SPECIFICATIONS

Power:	18W
Volt:	AC85-265V 50/60HZ
Beam Angle:	120° IP65
Lumen:	70~80LM/W Ra>80
Size:	235*120*95mm
Color temperature:	WW/NW/W
Shell:	Black/White
Material:	Alu+PMMA

IP65

Source sheet p.20

DB-LWL-A04GIP65-8WA

0092



DIMENSIONS

Φ110*120*165mm

SPECIFICATIONS


Power: 8W Done Driver
Volt: AC100-277V 50/60HZ
Beam Angle: 270° IP65
Lumen: 30~40LM/W Ra>80
Size: Φ110*120*165mm
Color temperature: WW/W/Y//R/G/B
Shell: White/Black 360° Rotary
Material: Aluminum Alloy

IP65

Source sheet p.20

DB-LWL-A05AIP65-4W

0093

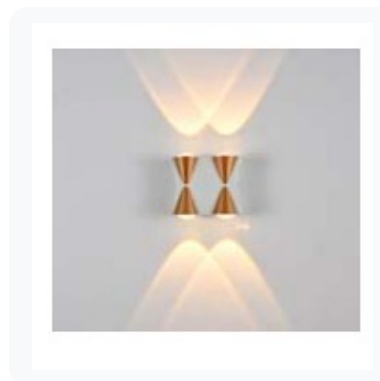

DIMENSIONS

90*80*45MM

SPECIFICATIONS

Power: 4*1W
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 90*80*45MM
Color temperature: WW/NW/W
Material: Aluminum Alloy

IP65

Source sheet p.20

DB-LWL-A05AIP65-6W

0094



DIMENSIONS

140*80*45MM

SPECIFICATIONS


Power: 6*1W
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 140*80*45MM
Color temperature: WW/NW/W
Material: Aluminum Alloy

IP65

Source sheet p.20

DB-LWL-A05AIP65-8W

0095

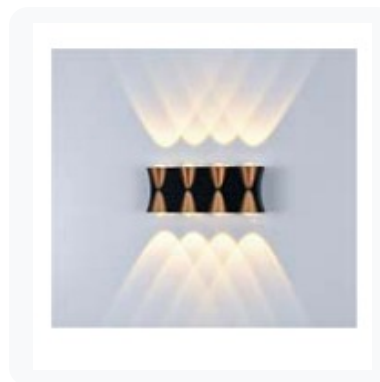

DIMENSIONS

190*80*45MM

SPECIFICATIONS


Power: 8*1W
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 190*80*45MM
Color temperature: WW/NW/W
Material: Aluminum Alloy

IP65

Source sheet p.20

DB-LWL-A05AIP65-10W

0096

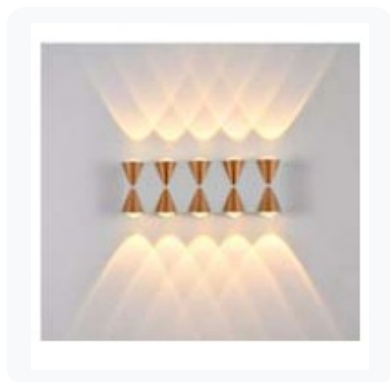

DIMENSIONS

240*80*45MM

SPECIFICATIONS


Power:	10*1W
Volt:	AC85-265V 50/60HZ
Beam Angle:	up&down IP65
Lumen:	70-80LM/W Ra>80
Size:	240*80*45MM
Color temperature:	WW/NW/W
Material:	Aluminum Alloy

IP65

Source sheet p.21

DB-LWL-A05AIP65-12W

0097

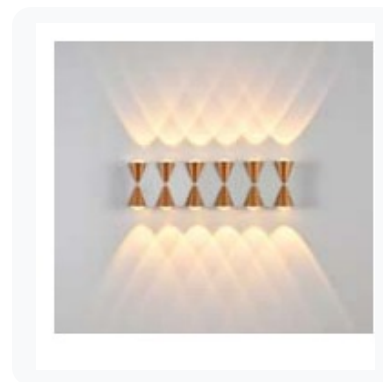

DIMENSIONS

290*80*45MM

SPECIFICATIONS

Power:	12*1W
Volt:	AC85-265V 50/60HZ
Beam Angle:	up&down IP65
Lumen:	70-80LM/W Ra>80
Size:	290*80*45MM
Color temperature:	WW/NW/W
Material:	Aluminum Alloy

IP65

Source sheet p.21

DB-LWL-A05BIP65-2W


0098

3 model variants in this series

SERIES SPECIFICATIONS

Wine-glass LED wall light

Power: 2W/6W/14W
Volt: AC85-265V 50/60HZ
Beam Angle: Up&Down IP65
Lumen: 80~90LM/W Ra>80
Color temperature: WW/NW/W
Shell: Black/White/Black+Gold
Material: Aluminum Alloy



MODEL

DIMENSION / SOURCE DETAIL

DB-LWL-A05BIP65-2W	130*65*60mm
DB-LWL-A05BIP65-6W	200*100*107mm
DB-LWL-A05BIP65-14W	300*150*140mm

IP65

Source sheet p.21

DB-LWL-A05CIP65-6W

0099

DIMENSIONS

160*68*60mm

SPECIFICATIONS

Power: 2*3W
Volt: AC85-265V 50/60HZ
Beam Angle: Up&Down IP65
Lumen: 80~90LM/W Ra>80
Size: 160*68*60mm
Color temperature: WW/W/Y/B/R/G
Shell: Black
Material: Aluminum Alloy



IP65

Source sheet p.21

DB-LWL-A06AIP65-6WA

0100

2 model variants in this series



SERIES SPECIFICATIONS

Power: 2*3W
Volt: AC85-265V 50/60HZ
Beam Angle: 0~180° IP65
Lumen: 50~60LM/W Ra>80
Size: 100*100*100MM
Color temperature: WW/NW/W
Shell: White/Black/Gloden+Black
Material: Aluminum Alloy

MODEL

DIMENSION / SOURCE DETAIL

DB-LWL-A06AIP65-6WA

100*100*100MM

DB-LWL-A06AIP65-6WA

IP65

Source sheet p.21

DB-LWL-A06AIP65-12WA

0101

2 model variants in this series



SERIES SPECIFICATIONS

Power: 2*6W
Volt: AC85-265V 50/60HZ
Beam Angle: 0~180° IP65
Lumen: 50~60LM/W Ra>80
Size: 100*100*100MM
Color temperature: WW/NW/W
Shell: White/Black/Gloden+Black
Material: Aluminum Alloy

MODEL

DIMENSION / SOURCE DETAIL

DB-LWL-A06AIP65-12WA

100*100*100MM

DB-LWL-A06AIP65-12WA

IP65

Source sheet p.22

DB-LWL-A06AIP65-7W-G9

0102



DIMENSIONS

100*100*100MM

SPECIFICATIONS

Power: 7W G9
Volt: AC85-265V 50/60HZ
Beam Angle: 0~180° IP65
Lumen: 50~60LM/W Ra>80
Size(R): 100*100*100MM
Color temperature: WW/NW/W
Shell: White/Black
Material: Aluminum Alloy

IP65

Source sheet p.22

DB-LWL-A06AIP65-S6WA

0103



DIMENSIONS

100*100*100MM

SPECIFICATIONS

Power: 2*3W with PIR Sensor
Volt: AC85-265V 50/60HZ
Beam Angle: 0~180° IP65
Lumen: 50~60LM/W Ra>80
Size: 100*100*100MM
Color temperature: WW/NW/W
Shell: White/Black
Material: Aluminum Alloy

IP65

PIR SENSOR

Source sheet p.22

DB-LWL-A06AIP65-S12WA

0104



DIMENSIONS

100*100*100MM

SPECIFICATIONS

Power:	2*6W with PIR Sensor
Volt:	AC85-265V 50/60HZ
Beam Angle:	0~180° IP65
Lumen:	70-80LM/W Ra>80
Size:	100*100*100MM
Color temperature:	WW/NW/W
Shell:	White/Black
Material:	Aluminum Alloy

IP65

PIR SENSOR

Source sheet p.22

DB-LWL-A06AIP65

0105



DIMENSIONS

100*100*100MM

SPECIFICATIONS


Power:	2*6W
Volt:	AC85-265V 50/60HZ
Beam Angle:	0~180° IP65
Lumen:	70-80LM/W Ra>80
Size:	100*100*100MM
Color temperature:	3000~6000K
Shell:	White/Black
Material:	Aluminum Alloy

IP65

Source sheet p.22

DB-LWL-A06AIP65-12WA

0106

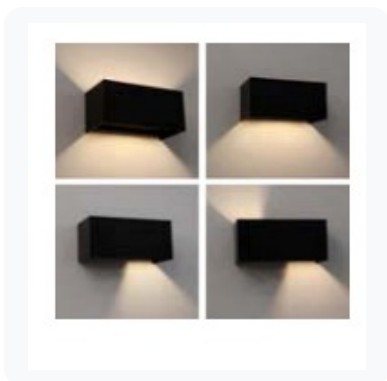

DIMENSIONS

200*100*100MM

SPECIFICATIONS

Power:	4*3W
Volt:	AC85-265V 50/60HZ
Beam Angle:	0~180° IP65
Lumen:	50~60LM/W Ra>80
Size:	200*100*100MM
Color temperature:	WW/NW/W
Shell:	White/Black
Material:	Aluminum Alloy

IP65

Source sheet p.23

DB-LWL-A06AIP65-24WA

0107



DIMENSIONS

200*100*100MM

SPECIFICATIONS

Power:	4*6W
Volt:	AC85-265V 50/60HZ
Beam Angle:	0~180° IP65
Lumen:	50~60LM/W Ra>80
Size:	200*100*100MM
Color temperature:	WW/NW/W
Shell:	White/Black
Material:	Aluminum Alloy

IP65

Source sheet p.23

DB-LWL-A06AIP65-S24WA

0108



DIMENSIONS

100*100*200MM

SPECIFICATIONS

Power:	4*6W With PIR Sensor
Volt:	AC85-265V 50/60HZ
Beam Angle:	0~180° IP65
Lumen:	70-80LM/W Ra>80
Size:	100*100*200MM
Color temperature:	WW/NW/W
Shell:	White/Black
Material:	Aluminum Alloy

IP65

PIR SENSOR

Source sheet p.23

DB-LWL-A06AIP65-20W

0109



DIMENSIONS

120*120*120MM

SPECIFICATIONS

Power:	2*10W
Volt:	AC85-265V 50/60HZ
Beam Angle:	0~180° IP65
Lumen:	50~60LM/W Ra>80
Size(R):	120*120*120MM
Color temperature:	WW/NW/W
Shell:	White/Black
Material:	Aluminum Alloy

IP65

Source sheet p.23

DB-LWL-A06AIP65-40W

0110



DIMENSIONS

150*150*150MM

SPECIFICATIONS


Power: 2*20W
Volt: AC85-265V 50/60HZ
Beam Angle: 0~180° IP65
Lumen: 50~60LM/W Ra>80
Size(R): 150*150*150MM
Color temperature: WW/NW/W
Shell: White/Black
Material: Aluminum Alloy

IP65

Source sheet p.23

DB-LWL-A06BIP65-7W

0111

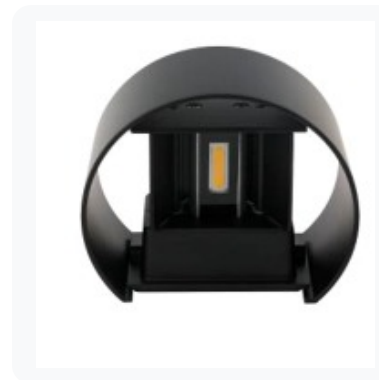

DIMENSIONS

135*100*100mm

SPECIFICATIONS

Power: 2*3.5W
Volt: AC85-265V 50/60HZ
Beam Angle: 0~180° IP65
Lumen: 70~80LM/W Ra>80
Size(R): 135*100*100mm
Color temperature: WW/NW/W
Shell: White/Black
Material: Aluminum Alloy

IP65

Source sheet p.24

DB-LWL-A06BIP65-12W

0112



DIMENSIONS

135*100*100mm

SPECIFICATIONS


Power: 2*6W
Volt: AC85-265V 50/60HZ
Beam Angle: 0~180° IP65
Lumen: 70~80LM/W Ra>80
Size(R): 135*100*100mm
Color temperature: WW/NW/W
Shell: White/Black
Material: Aluminum Alloy

IP65

Source sheet p.24

DB-LWL-A06BIP65-S7W

0113



DIMENSIONS

135*100*100mm

SPECIFICATIONS

Power: 2*3.5W with PIR Sensor
Volt: AC85-265V 50/60HZ
Beam Angle: 0~180° IP65
Lumen: 50~60LM/W Ra>80
Size: 135*100*100mm
Color temperature: WW/NW/W
Shell: White/Black
Material: Aluminum Alloy

IP65

PIR SENSOR

Source sheet p.24

DB-LWL-A06BIP65-S12W

0114



DIMENSIONS

135*100*100mm

SPECIFICATIONS

Power:	2*6W with PIR Sensor
Volt:	AC85-265V 50/60HZ
Beam Angle:	0~180° IP65
Lumen:	50~60LM/W Ra>80
Size:	135*100*100mm
Color temperature:	WW/NW/W
Shell:	White/Black
Material:	Aluminum Alloy


IP65

PIR SENSOR

Source sheet p.24

DB-LWL-A06CIP65-6W

0115

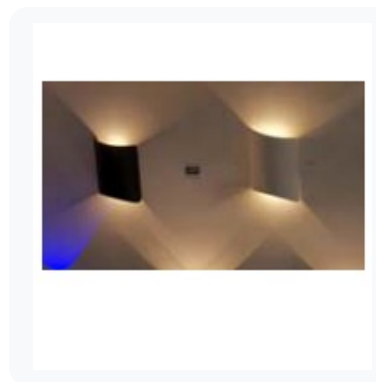

DIMENSIONS

125*65*220(H)MM

SPECIFICATIONS

Power:	2*3W
Volt:	AC85-265V 50/60HZ
Beam Angle:	Up&Down IP65
Lumen:	60~70LM/W Ra>80
Size:	125*65*220(H)MM
Color temperature:	WW/NW/W
Shell:	Black/White
Material:	Aluminum Alloy

IP65

Source sheet p.24

DB-LWL-A06CIP65-14W

0116



DIMENSIONS

125*65*220(H)MM

SPECIFICATIONS

Power: 2*7W
Volt: AC85-265V 50/60HZ
Beam Angle: Up&Down IP65
Lumen: 60~70LM/W Ra>80
Size: 125*65*220(H)MM
Color temperature: WW/NW/W
Shell: Black/White
Material: Aluminum Alloy

IP65

Source sheet p.25

DB-LWL-A06DIP65-10W

0117

2 model variants in this series



SERIES SPECIFICATIONS

Power: 2*5W
Volt: AC85-265V 50/60HZ
Beam Angle: Up&Down IP65
Lumen: 50~60LM/W Ra>80
Size: 175*175*90MM
Color temperature: WW/NW/W
Material: Aluminum Alloy

MODEL

DIMENSION / SOURCE DETAIL

DB-LWL-A06DIP65-10W

175*175*90MM


DB-LWL-A06DIP65-10W

IP65

Source sheet p.25

DB-LWL-A07AIP65-6W

0118

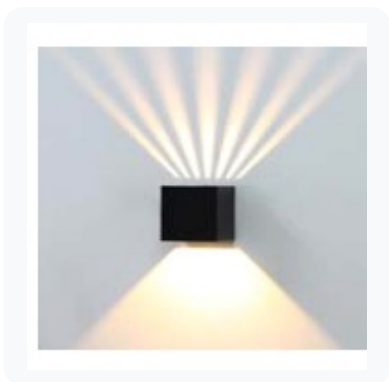

DIMENSIONS

100*100*60MM

SPECIFICATIONS


Power: 5+1W
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 50~60LM/W Ra>80
Size: 100*100*60MM
Color temperature: WW/NW/W
Shell: White/Black
Material: Aluminum Alloy

IP65

Source sheet p.25

DB-LWL-A07BIP65-6W

0119

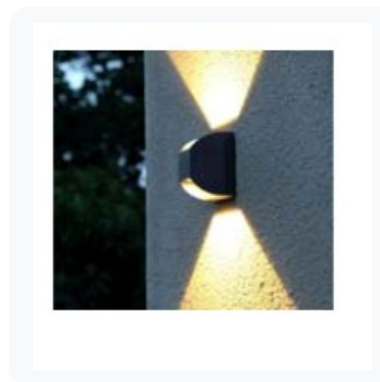

DIMENSIONS

124*88mm

SPECIFICATIONS

Power: 2*3W Cree
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 50~60LM/W Ra>80
Size: 124*88mm
Color temperature: WW/NW/W
Shell: White/Black
Material: Aluminum Alloy

IP65

Source sheet p.25

DB-LWL-A220IP65-10W

0120



DIMENSIONS

220*135*65

SPECIFICATIONS


Power:	10W SMD
Volt:	AC85-265V 50/60HZ
Beam Angle:	120°
Lumen:	80~90LM/W Ra>80
Size:	220*135*65mm
Color temperature:	WW/NW/W
Shell:	White/Black/Grey
Material:	Alu Alloy+PC

IP65

Source sheet p.25

DB-LWL-A08BIP65-18W

0121

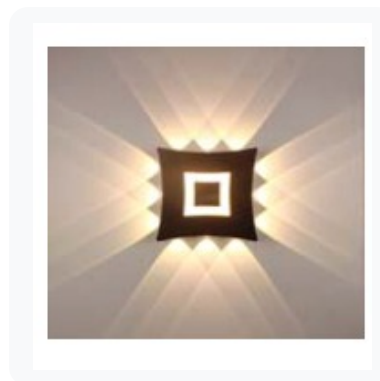

DIMENSIONS

185*185*45mm

SPECIFICATIONS

Power:	12*1W+6W
Volt:	AC85-265V 50/60HZ
Beam Angle:	4 face IP65
Lumen:	70~80LM/W Ra>80
Size:	185*185*45mm
Color temperature:	WW/NW/W
Shell:	White/Black
Material:	Aluminum Alloy

IP65

Source sheet p.26

DB-LWL-A08BIP65-18WS

0122



DIMENSIONS

185*185*45mm

SPECIFICATIONS

Power:	12*1W+6W With PIR Sensor
Volt:	AC85-265V 50/60HZ
Beam Angle:	4 face IP65
Lumen:	80~90LM/W Ra>80
Size:	185*185*45mm
Color temperature:	WW/NW/W
Shell:	White/Black
Material:	Aluminum Alloy

IP65

PIR SENSOR

Source sheet p.26

DB-LWL-A09AIP65-12WA

0123



DIMENSIONS

200*120*78mm

SPECIFICATIONS

Power:	2*1W+10W
Volt:	AC85-265V 50/60HZ
Beam Angle:	up&down IP65
Lumen:	70~80LM/W Ra>80
Size:	200*120*78mm
Color temperature:	WW/NW/W
Shell:	Black
Material:	Alu+PC Cover

IP65

Source sheet p.26

DB-LWL-A09AIP65-12WB

0124



DIMENSIONS

200*120*78mm

SPECIFICATIONS


Power: 2*1W+10W
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 200*120*78mm
Color temperature: WW/NW/W
Shell: Black
Material: Alu+PC Cover

IP65

Source sheet p.26

DB-LWL-A09BIP65-12W

0125

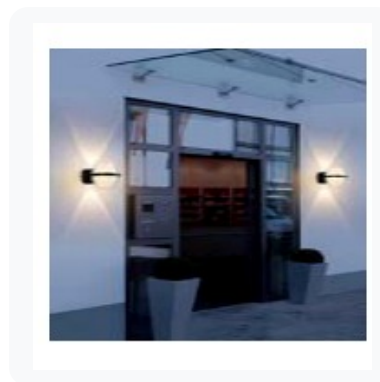

DIMENSIONS

150*120mm

SPECIFICATIONS


Power: 2*1+10W
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 150*120mm
Color temperature: WW/NW/W
Shell: White
Material: Alu+PC Cover

IP65

Source sheet p.26

DB-LWL-A09CIP65-7WA

0126

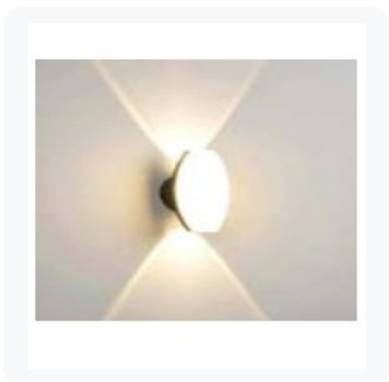

DIMENSIONS

170*86*85mm

SPECIFICATIONS


Power: 1+1+5W
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 170*86*85mm
Color temperature: WW/NW/W
Shell: White
Material: Alu+PC Cover

IP65

Source sheet p.27

DB-LWL-A09CIP65-7WB

0127

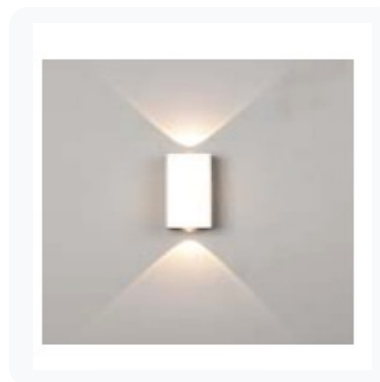

DIMENSIONS

155*70*45mm

SPECIFICATIONS

Power: 1+1+5W
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 155*70*45mm
Color temperature: WW/NW/W
Shell: White
Material: Alu+PC Cover

IP65

Source sheet p.27

DB-LWL-A09CIP65-7WC

0128



DIMENSIONS

155*70*45mm

SPECIFICATIONS

Power: 2*1W
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 155*70*45mm
Color temperature: WW/NW/W
Shell: White
Material: Alu+PC Cover

IP65

Source sheet p.27

DB-LWL-A09DIP65-7W

0129

2 model variants in this series



SERIES SPECIFICATIONS

Power: 2*1+5W/2*1+8W
Volt: AC85-265V 50/60HZ
Beam Angle: 60° up&down IP65
Lumen: 70~80LM/W Ra>80
Color temperature: WW/NW/W
Shell: White
Material: Alu+PC Cover

MODEL

DIMENSION / SOURCE DETAIL

DB-LWL-A09DIP65-7W	180*61*78mm
DB-LWL-A09DIP65-10W	300*64*78mm

IP65

Source sheet p.27

DB-LWL-A09EIP65-7W

0130

2 model variants in this series



SERIES SPECIFICATIONS

Power: 2*1+5W/2*1+8W
Volt: AC85-265V 50/60HZ
Beam Angle: 60° up&down IP65
Lumen: 70~80LM/W Ra>80
Color temperature: WW/NW/W
Shell: White
Material: Alu+PC Cover

MODEL

DIMENSION / SOURCE DETAIL

DB-LWL-A09EIP65-7W

181*61*78mm

DB-LWL-A09EIP65-10W

300*64*78mm

IP65

Source sheet p.27

DB-LWL-A09FIP65-7W

0131

2 model variants in this series



SERIES SPECIFICATIONS

Power: 2*1+5W/2*1+8W
Volt: AC85-265V 50/60HZ
Beam Angle: 60° up&down IP65
Lumen: 70~80LM/W Ra>80
Color temperature: WW/NW/W
Shell: White
Material: Alu+PC Cover

MODEL

DIMENSION / SOURCE DETAIL

DB-LWL-A09FIP65-7W

180*61*78mm

DB-LWL-A09FIP65-10W

300*64*78mm

IP65

Source sheet p.28

DB-LWL-A09GIP65-9W

0132

2 model variants in this series



SERIES SPECIFICATIONS

Power: 2+3+4W/2+3+6W
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Color temperature: WW/NW/W
Shell: White+Black
Material: Alu+PC Cover

MODEL

DIMENSION / SOURCE DETAIL

DB-LWL-A09GIP65-9W	150*51*55mm
DB-LWL-A09GIP65-11W	200*65*62mm

IP65

Source sheet p.28

DB-LWL-A10AIP65-5W

0133



DIMENSIONS

71*62*57mm

SPECIFICATIONS

Power: 5*1W
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 71*62*57mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.28

DB-LWL-A10AIP65-10W

0134



DIMENSIONS

116*70*57mm

SPECIFICATIONS


Power: 10*1W
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 116*70*57mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.28

DB-LWL-A10AIP65-15W

0135

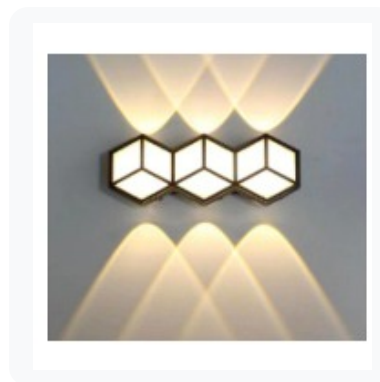

DIMENSIONS

171*70*57mm

SPECIFICATIONS

Power: 15*1W
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 171*70*57mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.28

DB-LWL-A10AIP65-20W

0136



DIMENSIONS

226*70*57mm

SPECIFICATIONS


Power:	20*1W
Volt:	AC85-265V 50/60HZ
Beam Angle:	up&down IP65
Lumen:	70~80LM/W Ra>80
Size:	226*70*57mm
Color temperature:	WW/NW/W
Shell:	Black
Material:	Aluminum Alloy

IP65

Source sheet p.29

DB-LWL-A12AIP65-3W

0137

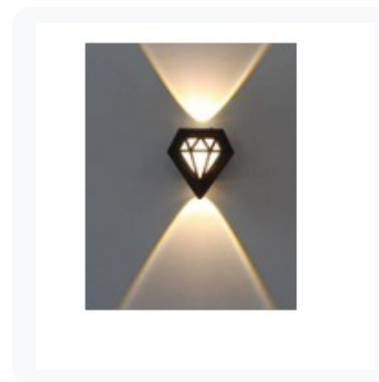

DIMENSIONS

75*84*62mm

SPECIFICATIONS


Power:	3*1W
Volt:	AC85-265V 50/60HZ
Beam Angle:	up&down IP65
Lumen:	70~80LM/W Ra>80
Size:	75*84*62mm
Color temperature:	WW/NW/W
Shell:	Black
Material:	Aluminum Alloy

IP65

Source sheet p.29

DB-LWL-A12AIP65-6W

0138

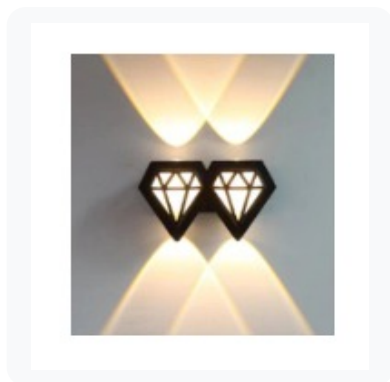

DIMENSIONS

126*78*62mm

SPECIFICATIONS


Power: 6*1W
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 126*78*62mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.29

DB-LWL-A12AIP65-9W

0139

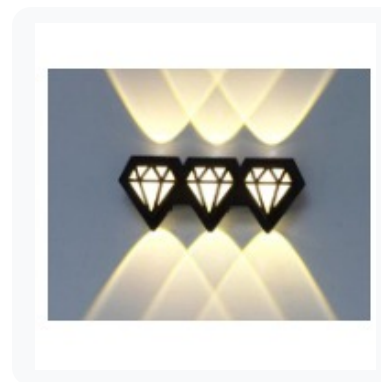

DIMENSIONS

181*78*62mm

SPECIFICATIONS


Power: 9*1W
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 181*78*62mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.29

DB-LWL-A12AIP65-12W

0140

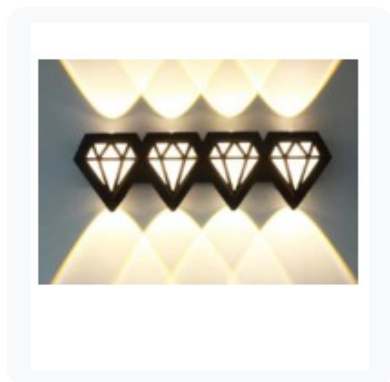

DIMENSIONS

236*78*62mm

SPECIFICATIONS


Power:	12*1W
Volt:	AC85-265V 50/60HZ
Beam Angle:	up&down IP65
Lumen:	70~80LM/W Ra>80
Size:	236*78*62mm
Color temperature:	WW/NW/W
Shell:	Black/White
Material:	Aluminum Alloy

IP65

Source sheet p.29

DB-LWL-A13AIP65-10W

0141

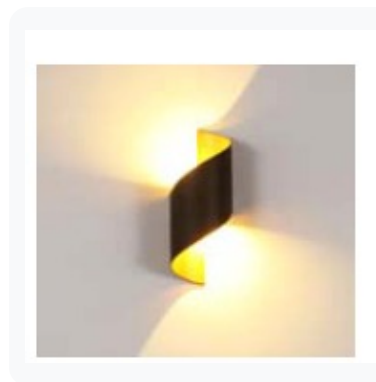

DIMENSIONS

280*Φ95*100MM

SPECIFICATIONS


Power:	2*5W
Volt:	AC85-265V 50/60HZ
Beam Angle:	up&down IP65
Lumen:	70~80LM/W Ra>80
Size:	280*Φ95*100MM
Color temperature:	WW/NW/W
Shell:	Black+Gold/White+Gold
Material:	Aluminum Alloy

IP65

Source sheet p.30

DB-LWL-A13BIP65-10W

0142



DIMENSIONS

Φ80*300MM

SPECIFICATIONS

Power: 2*5W
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 300*Φ80*90MM
Color temperature: WW/NW/W
Shell: Black+Gold/White+Gold
Material: Aluminum Alloy

IP65

Source sheet p.30

DB-LWL-A13CIP65-6W

0143

2 model variants in this series



SERIES SPECIFICATIONS

Power: 2*3W
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 270*Φ70*60mm
Color temperature: WW/NW/W
Material: Aluminum Alloy

MODEL

DIMENSION / SOURCE DETAIL

DB-LWL-A13CIP65-6W

270*Φ70*60mm

DB-LWL-A13CIP65-6W

IP65

Source sheet p.30

DB-LWL-A13DIP65-10W

0144



DIMENSIONS

250*85* 60mm

SPECIFICATIONS


Power: 2*5W COB
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 250*85* 60mm
Color temperature: WW/W
Material: Aluminum Alloy

IP65

Source sheet p.30

DB-LWL-A13EIP65-12W

0145

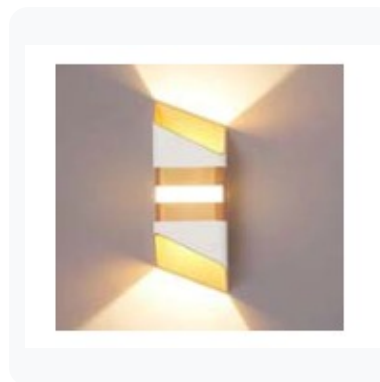

DIMENSIONS

250*85* 60mm

SPECIFICATIONS

Power: 5W*2+2W
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 250*85* 60mm
Color temperature: WW/W
Material: Aluminum Alloy

IP65

Source sheet p.30

DB-LWL-A14AIP65-12W

0146

3 model variants in this series



SERIES SPECIFICATIONS

Power: 12W 18W 30W
Volt: AC85-265V 50/60HZ
Beam Angle: up OR down IP65
Lumen: 70~80LM/W Ra>80
Color temperature: WW/W
Shell: Black
Material: Aluminum+PMMA

MODEL	DIMENSION / SOURCE DETAIL
DB-LWL-A14AIP65-12W	200*50*80mm
DB-LWL-A14AIP65-18W	300*50*80mm
DB-LWL-A14AIP65-30W	500*50*80mm

IP65

Source sheet p.30

DB-LWL-A14BIP65-12W

0147

3 model variants in this series



SERIES SPECIFICATIONS

Power: 12/18/30W
Volt: AC100-277V Done Driver
Beam Angle: 180° IP65,the lighting head can be 180° rotatable
Lumen: 70~80LM/W Ra>80
Color temperature: WW/NW/W
Shell: Sand Black/White
Material: Alu+Glass Cover

MODEL	DIMENSION / SOURCE DETAIL
DB-LWL-A14BIP65-12W	50*100*236mm
DB-LWL-A14BIP65-18W	50*100*336mm
DB-LWL-A14BIP65-30W	50*100*535mm

IP65

ROTATABLE

Source sheet p.31

0148

DB-LWL-A14CIP65-12W

3 model variants in this series



SERIES SPECIFICATIONS

Power: 12/18/30W
Volt: AC100-277V Done Driver
Beam Angle: 180° IP65, the lighting head can be 180° rotatable
Lumen: 70~80LM/W Ra>80
Color temperature: WW/NW/W
Shell: Sand Black/White
Material: Alu+Glass Cover

MODEL	DIMENSION / SOURCE DETAIL
DB-LWL-A14CIP65-12W	50*100*236mm
DB-LWL-A14CIP65-18W	50*100*336mm
DB-LWL-A14CIP65-30W	50*100*535mm

IP65

ROTATABLE

Source sheet p.31

DB-LWL-A15AIP65-16W

0149

5 MODEL VARIANTS



SERIES SPECIFICATIONS


Power:	16/24/32/40W/48W
Volt:	AC100-277V
Beam Angle:	360° IP65
Lumen:	70~80LM/W Ra>80
Color temperature:	WW/NW/W
Shell:	Black
Material:	Aluminum

MODEL	DIMENSION	SOURCE SPECIFICATION / FINISH
DB-LWL-A15AIP65-16W	115*60*400mm	1:Power:16/24/32/40W/48W / 2:Volt:AC100-277V / Finish: Black
DB-LWL-A15AIP65-24W	115*60*600mm	
DB-LWL-A15AIP65-32W	115*60*800mm	
DB-LWL-A15AIP65-40W	115*60*1000mm	
DB-LWL-A15AIP65-48W	115*60*1200mm	

IP65

DB-LWL-A16AIP65-4W

0150



DIMENSIONS

115*80*50mm

SPECIFICATIONS


Power: 4*1W Done Driver
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 115*80*50mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.31

DB-LWL-A16AIP65-6W

0151



DIMENSIONS

165*80*50mm

SPECIFICATIONS


Power: 6*1W Done Driver
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 165*80*50mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.32

DB-LWL-A16AIP65-8W

0152

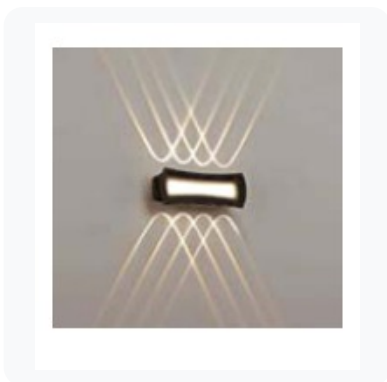

DIMENSIONS

210*85*50mm

SPECIFICATIONS


Power: 8*1W Done Driver
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 210*85*50mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.32

DB-LWL-A16BIP65-4W

0153

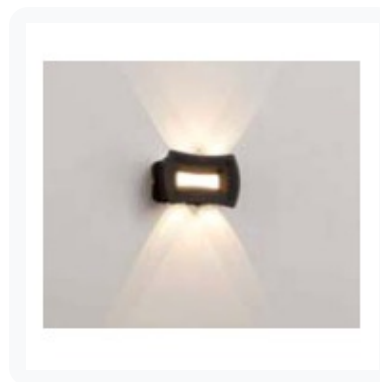

DIMENSIONS

115*80*50mm

SPECIFICATIONS

Power: 4*1W Done Driver
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 115*80*50mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.32

DB-LWL-A16BIP65-6W

0154



DIMENSIONS

165*80*50mm

SPECIFICATIONS

Power: 6*1W Done Driver
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 165*80*50mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.32

DB-LWL-A16BIP65-8W

0155



DIMENSIONS

210*85*50mm

SPECIFICATIONS


Power: 8*1W Done Driver
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 210*85*50mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.32

DB-LWL-A16CIP65-4W

0156



DIMENSIONS

115*80*50mm

SPECIFICATIONS


Power: 4*1W Done Driver
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 115*80*50mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.33

DB-LWL-A16CIP65-6W

0157



DIMENSIONS

165*80*50mm

SPECIFICATIONS


Power: 6*1W Done Driver
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 165*80*50mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.33

DB-LWL-A16CIP65-8W

0158



DIMENSIONS

210*85*50mm

SPECIFICATIONS

Power: 8*1W Done Driver
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 210*85*50mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.33

DB-LWL-A16DIP65-4W

0159



DIMENSIONS

115*80*50mm

SPECIFICATIONS

Power: 4*1W Done Driver
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 115*80*50mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.33

DB-LWL-A16DIP65-6W

0160



DIMENSIONS

165*80*50mm

SPECIFICATIONS

Power:	6*1W Done Driver
Volt:	AC85-265V 50/60HZ
Beam Angle:	up&down IP65
Lumen:	70~80LM/W Ra>80
Size:	165*80*50mm
Color temperature:	WW/NW/W
Shell:	Black
Material:	Aluminum Alloy

IP65

Source sheet p.33

DB-LWL-A16DIP65-8W

0161



DIMENSIONS

210*85*50mm

SPECIFICATIONS

Power:	8*1W Done Driver
Volt:	AC85-265V 50/60HZ
Beam Angle:	up&down IP65
Lumen:	70~80LM/W Ra>80
Size:	210*85*50mm
Color temperature:	WW/NW/W
Shell:	Black
Material:	Aluminum Alloy

IP65

Source sheet p.34

DB-LWL-A16EIP65-5W

0162



DIMENSIONS

200*60*50mm

SPECIFICATIONS

Power: 5W Done Driver
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 200*60*50mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.34

DB-LWL-A16FIP65-5W

0163



DIMENSIONS

210*60*50mm

SPECIFICATIONS

Power: 5W Done Driver
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 210*60*50mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.34

DB-LWL-A16FIP65-10W

0164



DIMENSIONS

310*60*50mm

SPECIFICATIONS


Power: 10W Done Driver
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 310*60*50mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.34

DB-LWL-A16GIP65-5W

0165

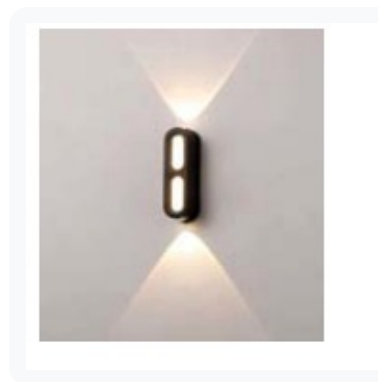

DIMENSIONS

210*60*50mm

SPECIFICATIONS

Power: 5W Done Driver
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 210*60*50mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.34

DB-LWL-A16GIP65-10W

0166



DIMENSIONS

310*60*50mm

SPECIFICATIONS


Power: 10W Done Driver
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 310*60*50mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.35

DB-LWL-A16HIP65-5W

0167

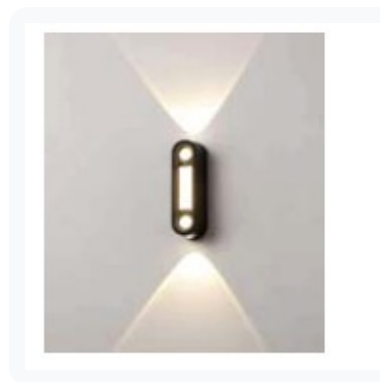

DIMENSIONS

210*60*50mm

SPECIFICATIONS

Power: 5W Done Driver
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 210*60*50mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.35

DB-LWL-A16HIP65-10W

0168



DIMENSIONS

310*60*50mm

SPECIFICATIONS

Power: 10W Done Driver
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 310*60*50mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.35

DB-LWL-A16IIP65-10W

0169



DIMENSIONS

220*75*52mm

SPECIFICATIONS

Power: 10W Done Driver
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 220*75*52mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.35

DB-LWL-A16JIP65-10W

0170



DIMENSIONS

310*60*50mm

SPECIFICATIONS


Power: 10W Done Driver
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 310*60*50mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.35

DB-LWL-A16KIP65-10W

0171

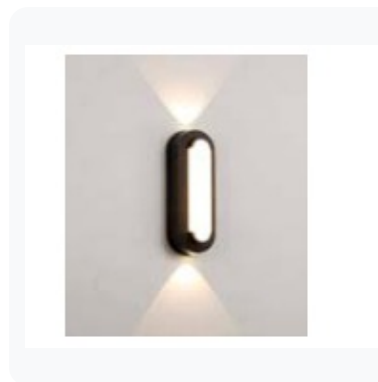

DIMENSIONS

300*100*60mm

SPECIFICATIONS

Power: 10W Done Driver
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 300*100*60mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.36

DB-LWL-A16LIP65-10W

0172



DIMENSIONS

300*100*50mm

SPECIFICATIONS


Power: 10W Done Driver
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 300*100*50mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.36

DB-LWL-A16MIP65-10W

0173

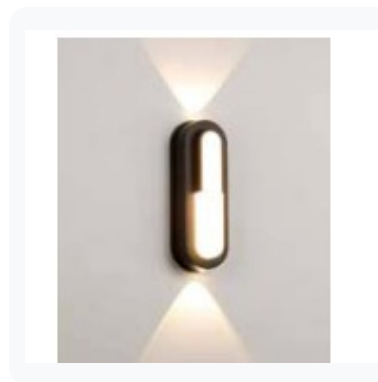

DIMENSIONS

300*100*100mm

SPECIFICATIONS


Power: 10W Done Driver
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 300*100*100mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.36

DB-LWL-A16NIP65-10W

0174

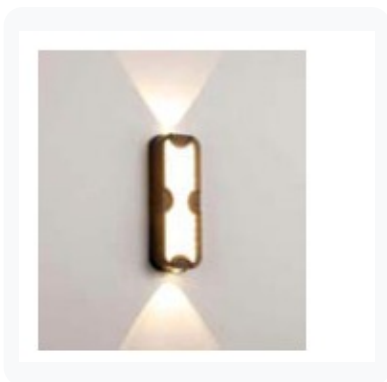

DIMENSIONS

300*100*50mm

SPECIFICATIONS


Power: 10W Done Driver
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 300*100*50mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.36

DB-LWL-A16OIP65-10W

0175

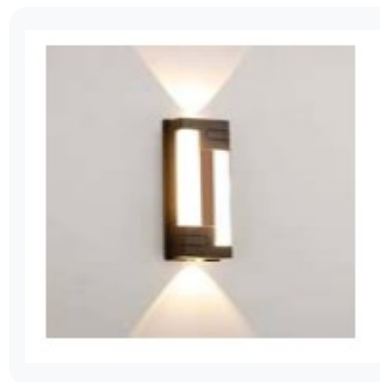

DIMENSIONS

300*500*55mm

SPECIFICATIONS

Power: 10W Done Driver
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 300*500*55mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.36

DB-LWL-A16PIP65-12W

0176

2 model variants in this series

SERIES SPECIFICATIONS

Power: 12/18W Done Driver
Volt: AC85-265V 50/60HZ
Beam Angle: 120° IP65
Lumen: 100-110LM/W Ra>80
Size: 200*85*80mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy



MODEL

DIMENSION / SOURCE DETAIL

DB-LWL-A16PIP65-12W

200*85*80mm

DB-LWL-A16PIP65-18W

IP65

Source sheet p.36

DB-LWL-A16QIP65-18W

0177

DIMENSIONS

300*120*60mm

SPECIFICATIONS

Power: 18W SMD
Volt: AC85-265V 50/60HZ
Beam Angle: 120° IP65
Lumen: 70~80LM/W Ra>80
Size: 300*120*60mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy




IP65

Source sheet p.37

DB-LWL-A16RIP65-12W

0178

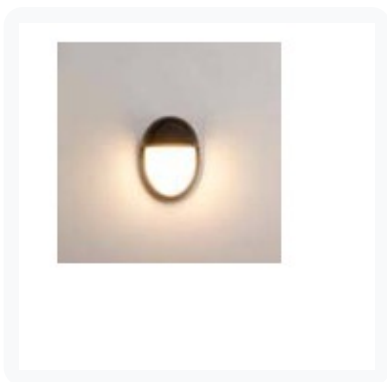

DIMENSIONS

225*150*80mm

SPECIFICATIONS


Power: 12W Done Driver
Volt: AC85-265V 50/60HZ
Beam Angle: 120° IP65
Lumen: 70~80LM/W Ra>80
Size: 225*150*80mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.37

DB-LWL-A16RIP65-E27

0179

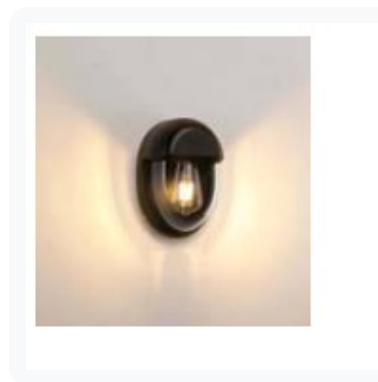

DIMENSIONS

225*150*80mm

SPECIFICATIONS

Power: E27 Light Base Done Driver
Volt: AC85-265V 50/60HZ
Beam Angle: 120° IP65
Lumen: 70~80LM/W Ra>80
Size: 225*150*80mm
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.37

DB-LWL-A17AIP65-E27

0180

2 model variants in this series

SERIES SPECIFICATIONS

Power:	E27 Light Base Done Driver
Volt:	AC85-265V 50/60HZ
Beam Angle:	120° IP65
Lumen:	70~80LM/W Ra>80
Size:	252*160*115mm
Shell:	Black
Material:	Aluminum Alloy



MODEL

DIMENSION / SOURCE DETAIL

DB-LWL-A17AIP65-E27

252*160*115mm

DB-LWL-A17AIP65-E27

IP65

Source sheet p.37

DB-LWL-A17BIP65-12W


0181

DIMENSIONS

260*250*180mm

SPECIFICATIONS

Power:	12W Done Driver
Volt:	AC85-265V 50/60HZ
Beam Angle:	120° IP65
Lumen:	70~80LM/W Ra>80
Size:	260*250*180mm
Color temperature:	WW/NW/W
Shell:	Black
Material:	Aluminum Alloy



IP65

Source sheet p.37

DB-LWL-A17BIP65-24W

0182



DIMENSIONS

370*250*180mm

SPECIFICATIONS

Power: 12+12W Bridgelux COB
Volt: AC85-265V 50/60HZ
Beam Angle: 120° IP65
Lumen: 70~80LM/W Ra>80
Size: 370*250*180mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.38

DB-LWL-A17CIP65-12W

0183



DIMENSIONS

260*250*180mm

SPECIFICATIONS

Power: 12W Done Driver
Volt: AC85-265V 50/60HZ
Beam Angle: 120° IP65
Lumen: 70~80LM/W Ra>80
Size: 260*250*180mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.38

DB-LWL-A17CIP65-24W

0184



DIMENSIONS

370*250*180mm

SPECIFICATIONS

Power: 12+12W Bridgelux COB
Volt: AC85-265V 50/60HZ
Beam Angle: 120° IP65
Lumen: 70~80LM/W Ra>80
Size: 370*250*180mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

IP65

Source sheet p.38

DB-LWL-A17DIP65-12W

0185

2 model variants in this series



SERIES SPECIFICATIONS

Power: 12W Bridgelux COB
Volt: AC85-265V 50/60HZ
Beam Angle: 120° IP65
Lumen: 70~80LM/W Ra>80
Size: 260*250*180mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

MODEL

DIMENSION / SOURCE DETAIL

DB-LWL-A17DIP65-12W

260*250*180mm

DB-LWL-A17DIP65-1

IP65

Source sheet p.38

DB-LWL-A17DIP65-24W

0186

2 model variants in this series



SERIES SPECIFICATIONS

Power: 12+12W Bridgelux COB
Volt: AC85-265V 50/60HZ
Beam Angle: 120° IP65
Lumen: 70~80LM/W Ra>80
Size: 470*250*180mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

MODEL

DIMENSION / SOURCE DETAIL

DB-LWL-A17DIP65-24W

470*250*180mm

DB-LWL-A17DIP65-2

IP65

Source sheet p.38

DB-LWL-A17EIP65-12W

0187

2 model variants in this series



SERIES SPECIFICATIONS

Power: 12W Bridgelux COB Done Driver
Volt: AC85-265V 50/60HZ
Beam Angle: 120° IP65
Lumen: 70~80LM/W Ra>80
Size: 260*250*180mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

MODEL

DIMENSION / SOURCE DETAIL

DB-LWL-A17EIP65-12W

260*250*180mm

DB-LWL-A17EIP65-1

IP65

Source sheet p.39

DB-LWL-A17EIP65-24W

0188

2 model variants in this series



SERIES SPECIFICATIONS

Power: 12+12W Bridgelux COB Done Driver
Volt: AC85-265V 50/60HZ
Beam Angle: 120° IP65
Lumen: 70~80LM/W Ra>80
Size: 260*250*180mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

MODEL

DIMENSION / SOURCE DETAIL

DB-LWL-A17EIP65-24W

470*250*180mm


DB-LWL-A17EIP65-2

IP65

Source sheet p.39

DB-LWL-A18AIP65-6W

0189



DIMENSIONS

115*90*30mm

SPECIFICATIONS

Power: 6W COB
Volt: AC85-265V 50/60HZ
Beam Angle: Up&Down IP65
Lumen: 50~60LM/W Ra>80
Size: 115*90*30mm
Color temperature: WW/NW/W
Shell: Black/White
Material: Alu+PMMA

IP65

Source sheet p.39

DB-LWL-A18AIP65-12W

0190



DIMENSIONS

175*90*30mm

SPECIFICATIONS

Power:	12W COB
Volt:	AC85-265V 50/60HZ
Beam Angle:	Up&Down IP65
Lumen:	50~60LM/W Ra>80
Size:	175*90*30mm
Color temperature:	WW/NW/W
Shell:	Black/White
Material:	Alu+PMMA

IP65

Source sheet p.39

DB-LWL-A18CIP65-6W

0191



DIMENSIONS

160*100*60mm

SPECIFICATIONS

Power:	6W
Volt:	AC85-265V 50/60HZ
Beam Angle:	Up&Down IP65
Lumen:	70~80LM/W Ra>80
Size:	160*100*60mm
Color temperature:	WW/NW/W
Shell:	Black
Material:	Alu+PMMA

IP65

Source sheet p.39

DB-LWL-A18DIP65-8W

0192



DIMENSIONS

Φ100*100mm

SPECIFICATIONS

Power: 8W
Volt: AC85-265V 50/60HZ
Beam Angle: 4 face IP65
Lumen: 70~80LM/W Ra>80
Size: Φ100*100mm
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy


IP65

Source sheet p.40

DB-LWL-A19AP65-6WS

0193

2 model variants in this series



SERIES SPECIFICATIONS

Power: 1*6W/ 2*3W
Volt: AC85-265V 50/60HZ
Beam Angle: Single Or Double Head IP65
Lumen: 70~80LM/W Ra>80
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

MODEL

DIMENSION / SOURCE DETAIL

DB-LWL-A19AP65-6WS

1*6W

DB-LWL-A19AP65-6WD

IP65

Source sheet p.40

DB-LWL-A19BIP65-6W

0194



DIMENSIONS

40*60*(H)120MM

SPECIFICATIONS


Power: 2*3W COB
Volt: AC85-265V 50/60HZ
Beam Angle: 10° up&down IP65
Lumen: 50~60LM/W Ra>80
Size(R): 40*60*(H)120MM
Color temperature: WW/NW/W
Shell: Black/Silver
Material: Aluminum Alloy

IP65

Source sheet p.40

DB-LWL-A20BIP65-2W

0195

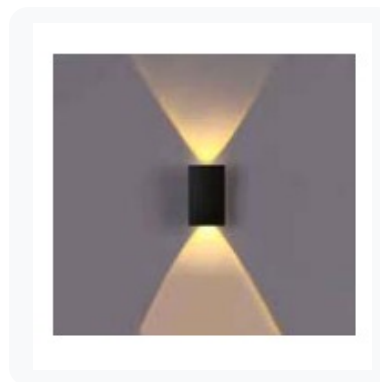

DIMENSIONS

65*110*45mm

SPECIFICATIONS

Power: 2*1W
Volt: AC95-265V 50/60HZ
Beam Angle: 120°up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 65*110*45mm
Color temperature: WW/NW/W
Shell: Black/White
Material: Aluminum Alloy

IP65

Source sheet p.40

DB-LWL-A20BIP65-4W

0196



DIMENSIONS

120*100*45mm

SPECIFICATIONS


Power:	4*1W
Volt:	AC95-265V 50/60HZ
Beam Angle:	120°up&down IP65
Lumen:	70~80LM/W Ra>80
Size:	120*100*45mm
Color temperature:	WW/NW/W
Shell:	Black/White
Material:	Aluminum Alloy

IP65

Source sheet p.40

DB-LWL-A20BIP65-6W

0197

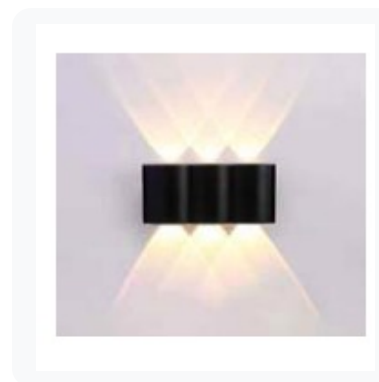

DIMENSIONS

175*100*45mm

SPECIFICATIONS

Power:	6*1W
Volt:	AC95-265V 50/60HZ
Beam Angle:	120°up&down IP65
Lumen:	70~80LM/W Ra>80
Size:	175*100*45mm
Color temperature:	WW/NW/W
Shell:	Black/White
Material:	Aluminum Alloy

IP65

Source sheet p.41

DB-LWL-A20BIP65-8W

0198



DIMENSIONS

230*100*45mm

SPECIFICATIONS

Power:	8*1W
Volt:	AC95-265V 50/60HZ
Beam Angle:	120°up&down IP65
Lumen:	70~80LM/W Ra>80
Size:	230*100*45mm
Color temperature:	WW/NW/W
Shell:	Black/White
Material:	Aluminum Alloy

IP65

Source sheet p.41

DB-LWL-A20DIP65-6W

0199



DIMENSIONS

170*45*80MM

SPECIFICATIONS

Power:	6*1W high power
Volt:	AC85-265V 50/60HZ
Beam Angle:	120° up&down IP65
Lumen:	70~80LM/W Ra>80
Size:	170*45*80MM
Color temperature:	WW/NW/W
Shell:	White/Black
Material:	Aluminum Alloy

IP65

Source sheet p.41

DB-LWL-A20DIP65-8W

0200



DIMENSIONS

220*90*50mm

SPECIFICATIONS

Power:	8*1W high power
Volt:	AC85-265V 50/60HZ
Beam Angle:	120° up&down IP65
Lumen:	70~80LM/W Ra>80
Size:	220*90*50mm
Color temperature:	WW/NW/W
Shell:	White/Black
Material:	Aluminum Alloy
PIR option available	

IP65

PIR SENSOR

Source sheet p.41

DB-LWL-A20DIP65-10W

0201



DIMENSIONS

270*90*50mm

SPECIFICATIONS

Power:	10*1W high power
Volt:	AC85-265V 50/60HZ
Beam Angle:	120° up&down IP65
Lumen:	70~80LM/W Ra>80
Size:	270*90*50mm
Color temperature:	WW/NW/W
Shell:	White/Black
Material:	Aluminum Alloy

IP65

Source sheet p.41

DB-LWL-A20DIP65-12W

0202



DIMENSIONS

320*90*50mm

SPECIFICATIONS


Power:	12*1W high power
Volt:	AC85-265V 50/60HZ
Beam Angle:	120° up&down IP65
Lumen:	70~80LM/W Ra>80
Size:	320*90*50mm
Color temperature:	WW/NW/W
Shell:	White/Black
Material:	Aluminum Alloy

IP65

Source sheet p.42

DB-LWL-A20GIP65-4W

0203



DIMENSIONS

80*120*30mm

SPECIFICATIONS


Power:	4*1W
Volt:	AC85-265V 50/60HZ
Beam Angle:	120°up&down IP65
Lumen:	70~80LM/W Ra>80
Size:	80*120*30mm
Color temperature:	WW/NW/W
Shell:	Black/White
Material:	Aluminum Alloy

IP65

Source sheet p.42

DB-LWL-A20GIP65-6W

0204



DIMENSIONS

130*120*30mm

SPECIFICATIONS


Power:	6*1W
Volt:	AC85-265V 50/60HZ
Beam Angle:	120°up&down IP65
Lumen:	70~80LM/W Ra>80
Size:	130*120*30mm
Color temperature:	WW/NW/W
Shell:	Black/White
Material:	Aluminum Alloy

IP65

Source sheet p.42

DB-LWL-A20GIP65-8W

0205



DIMENSIONS

170*120*30mm

SPECIFICATIONS

Power:	8*1W
Volt:	AC85-265V 50/60HZ
Beam Angle:	120°up&down IP65
Lumen:	70~80LM/W Ra>80
Size:	170*120*30mm
Color temperature:	WW/NW/W
Shell:	Black/White
Material:	Aluminum Alloy

IP65

Source sheet p.42

DB-LWL-A22AIP65-4W

0206



DIMENSIONS

255*110*55mm

SPECIFICATIONS


Power: 4W
Volt: AC85-265V 50/60HZ
Beam Angle: up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 255*110*55mm
Color temperature: WW/NW/W
Shell: Black/White
Material: Aluminum Alloy

IP65

Source sheet p.42

DB-LWL-A22BIP65-5W

0207



DIMENSIONS

110*70*55mm

SPECIFICATIONS


Power: 5W
Volt: AC85-265V 50/60HZ
Beam Angle: 200° IP65
Lumen: 70~80LM/W Ra>80
Size: 110*70*55mm
Color temperature: WW/NW/W
Shell: Black/White
Material: Aluminum Alloy

IP65

Source sheet p.43

DB-LWL-A22CIP65-10W

0208

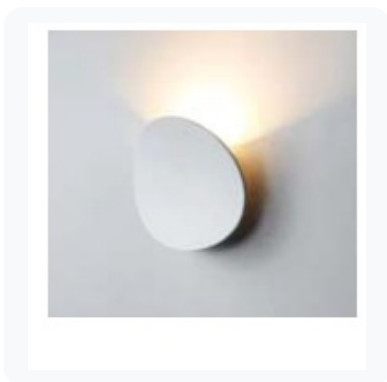

DIMENSIONS

180*180*70mm

SPECIFICATIONS


Power:	10W
Volt:	AC85-265V 50/60HZ
Beam Angle:	120° IP65
Lumen:	70~80LM/W Ra>80
Size:	180*180*70mm
Color temperature:	WW/NW/W
Shell:	Black/White
Material:	Aluminum Alloy

IP65

Source sheet p.43

DB-LWL-A24AIP65-18W

0209

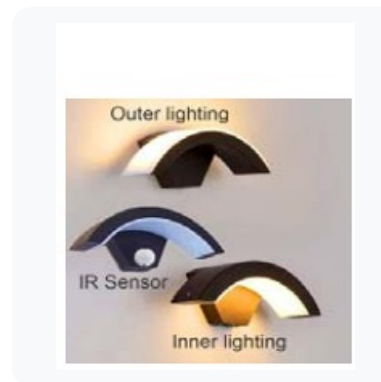

DIMENSIONS

293*100*91mm

SPECIFICATIONS

Power:	18W SMD
Volt:	AC85-265V 50/60HZ
Beam Angle:	120/240° IP65
Lumen:	70~80LM/W Ra>80
Size:	293*100*91mm
Color temperature:	WW/NW/W
Shell:	Black
lighting way:	inner or outer
Material:	Aluminum Alloy
with IR Sensor	

IP65

Source sheet p.43

DB-LWL-A24CIP65-10W

0210



DIMENSIONS

50*100*300(H)MM

SPECIFICATIONS


Power: 10W SMD
Volt: AC85-265V 50/60HZ
Beam Angle: 270° Up&down IP65
Lumen: 70~80LM/W Ra>80
Size: 50*100*300(H)MM
Color temperature: WW/NW/W
Shell: Black
Material: Alu+PC Cover
with IR Sensor

IP65

Source sheet p.43

DB-LWL-A25AIP65-12WR

0211

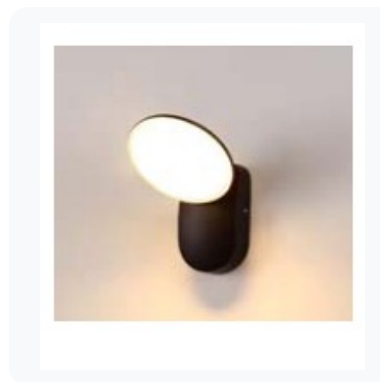

DIMENSIONS

180*135*130mm

SPECIFICATIONS


Power: 12W
Volt: AC85-265V 50/60HZ
Beam Angle: 270° IP65
Lumen: 70~80LM/W Ra>80
Size: 180*135*130mm
Color temperature: WW/NW/W
Shell: Black/White
Material: Alu+PC Cover
with IR Sensor

IP65

Source sheet p.43

DB-LWL-A25AIP65-12WS

0212

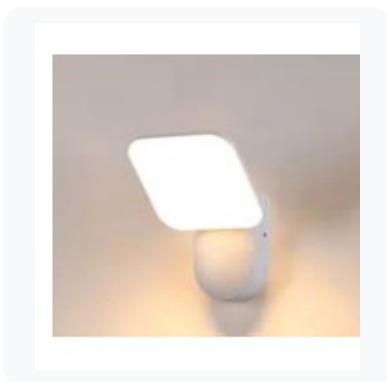

DIMENSIONS

180*135*130mm

SPECIFICATIONS


Power: 12W
Volt: AC85-265V 50/60HZ
Beam Angle: 270° IP65
Lumen: 70~80LM/W Ra>80
Size: 180*135*130mm
Color temperature: WW/NW/W
Shell: Black/White
Material: Alu+PC Cover
with IR Sensor

IP65

Source sheet p.44

DB-LWL-A25BIP65-18W

0213

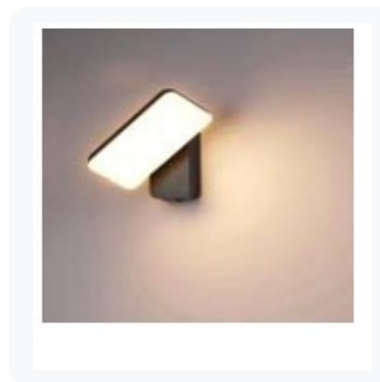

DIMENSIONS

200*160*150mm

SPECIFICATIONS

Power: 18W
Volt: AC85-265V 50/60HZ
Beam Angle: 270° IP65
Lumen: 70~80LM/W Ra>80
Size: 220*100*150mm
Color temperature: WW/NW/W
Shell: Black/White
Material: Alu+PC Cover

IP65

Source sheet p.44

DB-LWL-A25DIP65-18W

0214



DIMENSIONS

200*160*45mm

SPECIFICATIONS

Power: 18W
Volt: AC85-265V 50/60HZ
Beam Angle: 270° IP65
Lumen: 70~80LM/W Ra>80
Size: 200*160*45mm
Color temperature: WW/NW/W
Shell: Black
Material: Alu+PC Cover
with IR Sensor

IP65

Source sheet p.44

DB-LWL-A25EIP65-12W

0215



DIMENSIONS

210*85*85mm

SPECIFICATIONS

Power: 12W
Volt: AC85-265V 50/60HZ
Beam Angle: 270° IP65
Lumen: 70~80LM/W Ra>80
Size: 210*85*85mm
Color temperature: WW
Shell: Black
Material: Alu+PC Cover

IP65

Source sheet p.44

DB-LWL-A25EIP65-12WS

0216



DIMENSIONS

210*85*85mm

SPECIFICATIONS

Power:	12W With PIR Sensor
Volt:	AC85-265V 50/60HZ
Beam Angle:	270° IP65
Lumen:	70~80LM/W Ra>80
Size:	210*85*85mm
Color temperature:	WW
Shell:	Black
Material:	Alu+PC Cover

IP65

PIR SENSOR

Source sheet p.44

DB-LWL-A25FIP65-12WS

0217



DIMENSIONS

135*128*70mm

SPECIFICATIONS

Power:	12W With PIR Sensor
Volt:	AC85-265V 50/60HZ
Beam Angle:	270° IP65
Lumen:	70~80LM/W Ra>80
Size:	135*128*70mm
Color temperature:	WW
Shell:	Black
Material:	Alu+PC Cover

IP65

PIR SENSOR

Source sheet p.45

DB-LWL-A25GIP65-12WS

0218



DIMENSIONS

190*100*90mm

SPECIFICATIONS

Power: 12W With PIR Sensor
Volt: AC85-265V 50/60HZ
Beam Angle: 270° IP65
Lumen: 70~80LM/W Ra>80
Size: 190*100*90mm
Color temperature: WW
Shell: Black
Material: Alu+PC Cover


IP65

PIR SENSOR

Source sheet p.45

DB-LWL-A25HIP65-12WS

0219

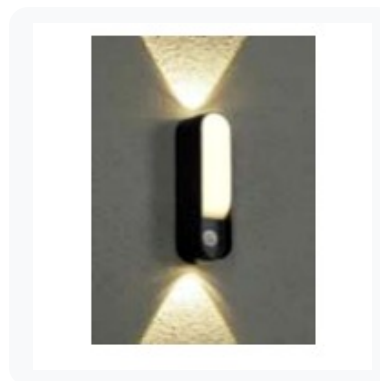

DIMENSIONS

260*60*60mm

SPECIFICATIONS

Power: 12W With PIR Sensor
Volt: AC85-265V 50/60HZ
Beam Angle: 270° IP65
Lumen: 70~80LM/W Ra>80
Size: 260*60*60mm
Color temperature: WW
Shell: Black
Material: Alu+PC Cover


IP65

PIR SENSOR

Source sheet p.45

DB-LWL-A25IIP65-6W

0220

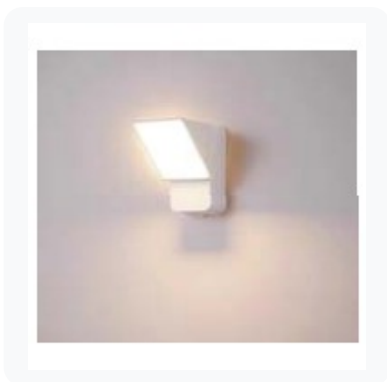

DIMENSIONS

155*90*140mm

SPECIFICATIONS

Power: 6W
Volt: AC85-265V 50/60HZ
Beam Angle: 270° rotatable IP65
Lumen: 70~80LM/W Ra>80
Size: 155*90*140mm
Color temperature: WW
Shell: Black/White
Material: Alu+PC Cover


IP65

ROTATABLE

Source sheet p.45

DB-LWL-A25JIP65-6W

0221

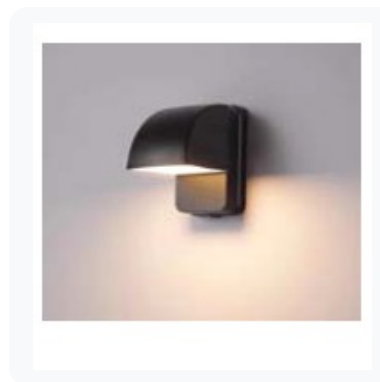

DIMENSIONS

155*90*145mm

SPECIFICATIONS

Power: 6W
Volt: AC85-265V 50/60HZ
Beam Angle: 270° rotatable IP65
Lumen: 70~80LM/W Ra>80
Size: 155*90*145mm
Color temperature: WW
Shell: Black/White
Material: Alu+PC Cover


IP65

ROTATABLE

Source sheet p.45

DB-LWL-A25KIP65-18W

0222



DIMENSIONS

200*165*115MM

SPECIFICATIONS

Power: 18W
Volt: AC100-277V Done Driver
Beam Angle: 180° IP65, the head can be 180° rotatable
Lumen: 90~100LM/W Ra>80
Size: 200*165*115MM
Color temperature: WW/NW/W
Shell: Black/White
Material: Aluminum+PC


IP65

ROTATABLE

Source sheet p.46

DB-LWL-A25KIP65-18W

0223



DIMENSIONS

200*165*115MM

SPECIFICATIONS

Power: 18W;PIR sensor
Volt: AC100-277V Done Driver
Beam Angle: 180° IP65, the head can be 180° rotatable
Lumen: 90~100LM/W Ra>80
Size: 200*165*115MM
Color temperature: WW/NW/W
Shell: Black/White
Material: Aluminum+PC

IP65

PIR SENSOR

ROTATABLE

Source sheet p.46

DB-LWL-A25LIP65-18W

0224



DIMENSIONS

Φ220MM Base:Φ118MM

SPECIFICATIONS

Power: 18W
Volt: AC100-277V Done Driver
Beam Angle: 180° IP65, the head can be 180° rotatable
Lumen: 90~100LM/W Ra>80
Size: Φ220MM Base:Φ118MM
Color temperature: WW/NW/W
Shell: Black/White
Material: Aluminum+PC

IP65

ROTATABLE

Source sheet p.46

DB-LWL-A25LIP65-18W

0225



DIMENSIONS

Φ220MM Base:Φ118MM

SPECIFICATIONS

Power: 18W; PIR sensor
Volt: AC100-277V Done Driver
Beam Angle: 180° IP65, the head can be 180° rotatable
Lumen: 90~100LM/W Ra>80
Size: Φ220MM Base:Φ118MM
Color temperature: WW/NW/W
Shell: Black/White
Material: Aluminum+PC

IP65

PIR SENSOR


ROTATABLE

Source sheet p.46

0226

DB-LWL-A26AIP65-10W

2 model variants in this series

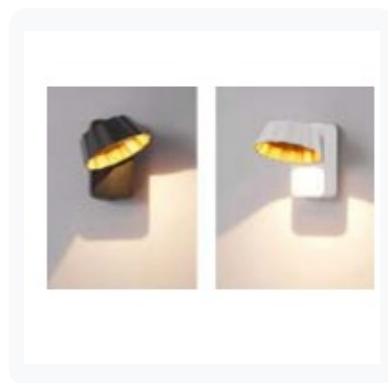

SERIES SPECIFICATIONS

Power: 5W
Volt: AC85-265V 50/60HZ
Beam Angle: 270° IP65
Lumen: 70~80LM/W Ra>80
Size: 155*125*80mm
Color temperature: WW/NW/W
Material: Alu+PC Cover
 The lamp body can be rotated 180°

MODEL

DIMENSION / SOURCE DETAIL

DB-LWL-A26AIP65-10W

155*125*80mm

DB-LWL-A26AIP65-10W

IP65

ROTATABLE

Source sheet p.46

DB-LWL-A28AIP65-6W

0227

7 MODEL VARIANTS



SERIES SPECIFICATIONS

Double-head Round led wall light

Power: 6/12/18/24/30/36/48W

CREE CHIP

Volt: AC100-277V Done Driver

Beam Angle: Up&Down IP65

Lumen: 80~90LM/W Ra>80

Color temperature: WW/NW/W

Shell: Black/Grey

Material: Aluminum Alloy

MODEL	DIMENSION	SOURCE SPECIFICATION / FINISH
DB-LWL-A28AIP65-6W	Φ65*H160mm	1:Double-head Round led wall light / 2:Power:6/12/18/24/30/36/48W / Fini
DB-LWL-A28AIP65-12W	Φ90*H260mm	
DB-LWL-A28AIP65-18W	Φ108*H300mm	
DB-LWL-A28AIP65-24W	Φ108*H300mm	
DB-LWL-A28AIP65-30W	Φ145*H300mm	
DB-LWL-A28AIP65-36W	Φ145*H300mm	
DB-LWL-A28AIP65-48W	Φ160*H300mm	

DB-LWL-A28BIP65-3W

0228

8 MODEL VARIANTS



SERIES SPECIFICATIONS

Single-head square led wall light

Power: 3/6/9/12/15/18/24/36W

CREE CHIP

Volt: AC100-277V Done Driver

Beam Angle: Up Or Down IP65

Lumen: 80~90LM/W Ra>80

Color temperature: WW/NW/W

Shell: Black/Grey


Material: Aluminum Alloy

MODEL	DIMENSION	SOURCE SPECIFICATION / FINISH
DB-LWL-A28BIP65-3W	63*63*H120mm	1:Single-head square led wall light / 2:Power:3/6/9/12/15/18/24/36W / Fi
DB-LWL-A28BIP65-6W	90*90*H160mm	
DB-LWL-A28BIP65-9W	120*120*H200mm	
DB-LWL-A28BIP65-12W	120*120*H200mm	
DB-LWL-A28BIP65-15W	150*150*H200mm	
DB-LWL-A28BIP65-18W	150*150*H200mm	
DB-LWL-A28BIP65-24W	150*150*H200mm	
DB-LWL-A28BIP65-36W	150*150*H200mm	

DB-LWL-A28CIP65-5WR

0229

Single-head Round led wall light

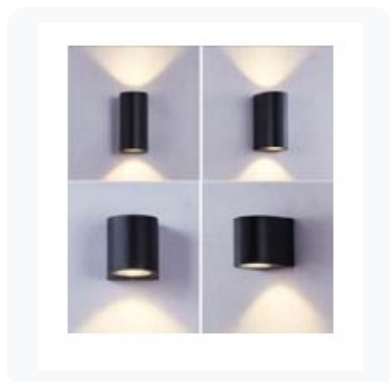

DIMENSIONS

68*80*80mm

SPECIFICATIONS

Power:	1*5W (GU10 Light Base)
Volt:	85-265V 50/60HZ
Beam Angle:	Up Or Down IP65
Lumen:	70~80LM/W Ra>80
Size:	68*80*80mm
Color temperature:	WW/NW/W
Shell:	Black/White
Material:	Aluminum Alloy


IP65

Source sheet p.47

DB-LWL-A28CIP65-12WR

0230

Double-head Round led wall light

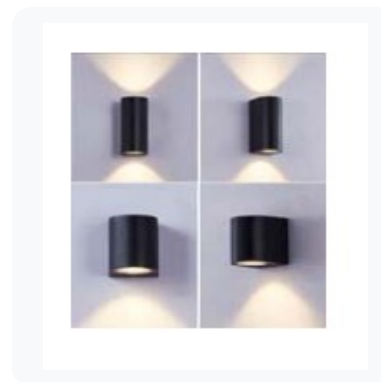

DIMENSIONS

68*80*150mm

SPECIFICATIONS

Power:	1*12W (GU10 Light Base)
Volt:	85-265V 50/60HZ
Beam Angle:	Up And Down IP65
Lumen:	70~80LM/W Ra>80
Size:	68*80*150mm
Color temperature:	WW/NW/W
Shell:	Black/White
Material:	Aluminum Alloy

IP65

Source sheet p.47

DB-LWL-A28CIP65-5WS

0231

Single-head Square led wall light



DIMENSIONS

68*80*80mm

SPECIFICATIONS

Power:	1*5W (GU10 Light Base)
Volt:	85-265V 50/60HZ
Beam Angle:	Up Or Down IP65
Lumen:	70~80LM/W Ra>80
Size:	68*80*80mm
Color temperature:	WW/NW/W
Shell:	Black/White
Material:	Aluminum Alloy

IP65

Source sheet p.48

DB-LWL-A28CIP65-12WS

0232

Double-head Square led wall light



DIMENSIONS

68*80*150mm

SPECIFICATIONS

Power:	2*6W (GU10 Light Base)
Volt:	85-265V 50/60HZ
Beam Angle:	Up And Down IP65
Lumen:	70~80LM/W Ra>80
Size:	68*80*150mm
Color temperature:	WW/NW/W
Shell:	Black/White
Material:	Aluminum Alloy


IP65

Source sheet p.48

DB-LWL-A29AIP65-12W

0233

3 model variants in this series

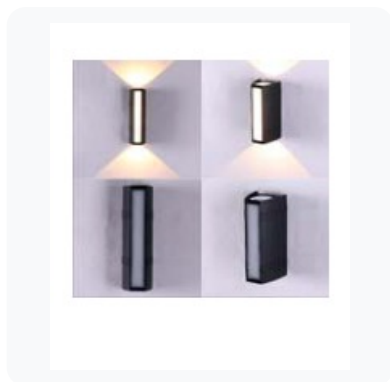

SERIES SPECIFICATIONS

Power: 12/18/24/36W
Volt: AC85-265V 50/60HZ
Beam Angle: 180° IP65
Lumen: 70~80LM/W Ra>80
Color temperature: WW/NW/W
Shell: Black
Material: Alu+PC Cover

MODEL	DIMENSION / SOURCE DETAIL
DB-LWL-A29AIP65-12W	65*70*(H)155mm
DB-LWL-A29AIP65-18W	65*70*(H)220mm
DB-LWL-A29AIP65-24W	65*70*(H)370mm


IP65

Source sheet p.48

DB-LWL-A29BIP65-7W

0234

2 model variants in this series

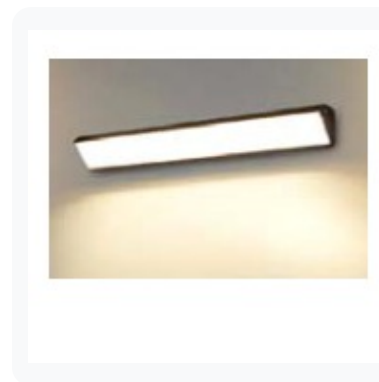

SERIES SPECIFICATIONS

Power: 7/14/20/28/36/45/52W
Volt: AC85-265V 50/60HZ
Beam Angle: 180° IP65
Lumen: 70~80LM/W Ra>80
Color temperature: WW/NW/W
Shell: Black/White
Material: Alu+PC Cover

MODEL	DIMENSION / SOURCE DETAIL
DB-LWL-A29BIP65-7W	80*80*(L)200mm
DB-LWL-A29BIP65-14W	80*80*(L)400mm

IP65

Source sheet p.48

DB-LWL-A29CIP65-18W

0235



DIMENSIONS

300*115*110mm

SPECIFICATIONS

Power: 18W
Volt: AC85-265V 50/60HZ
Beam Angle: 180° IP65
Lumen: 70~80LM/W Ra>80
Color temperature: WW/NW/W
Shell: Black
Material: Alu+PC Cover


IP65

Source sheet p.48

DB-LWL-A29DIP65-10W

0236

3 model variants in this series



SERIES SPECIFICATIONS

Power: 2*5W/2*7W/2*10W Bridgelux
Volt: AC85-265V
Beam Angle: Up&Down IP65
Lumen: 70~80LM/W Ra>80
Color temperature: WW/NW/W
Shell: Black
Material: Aluminum Alloy

MODEL

DIMENSION / SOURCE DETAIL

DB-LWL-A29DIP65-10W	205*70*45mm
DB-LWL-A29DIP65-14W	410*70*45mm
DB-LWL-A29DIP65-20W	610*70*45mm

IP65

Source sheet p.49

DB-LWL-A29CIP65-10W

0237



DIMENSIONS

145*130*140mm

SPECIFICATIONS

Power:	5*2W
Volt:	AC85-265V 50/60HZ
Beam Angle:	120° up&down IP65
Lumen:	70~80LM/W Ra>80
Size:	145*130*140mm
Color temperature:	WW/NW/W
Shell:	White/Black
Material:	PMMA

IP65

Source sheet p.49