


LED SLIM WALL PACK



Long Lifespan

Premium 2835 LED chips lasting over 50,000 hours

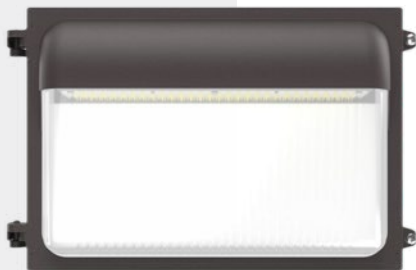

UL/cUL/DLC 5.1 Premium pending.



A lot of options for choice

3CCT Selectable, Wattage Switchable, Photocell, Motion Sensor, 8W Emergency Driver Available



Wattage Selectable - 30Watts / 40Watts / 50Watts / 60Watts
Light Colour Selectable - 3000K / 4000K / 6000K

Covering any unsightly stains.



Save up to 85% ENERGY

With our latest in LED technology you will save up to 85% on energy costs and save hundreds of dollars.




Strong housing and Anti-yellow glass

K08 borosilicate prismatic glass with die-cast aluminum housing.



Easy installation

Detachable mounting plate fits most standard junction boxes or can be surface mounted and wired via conduit entries.

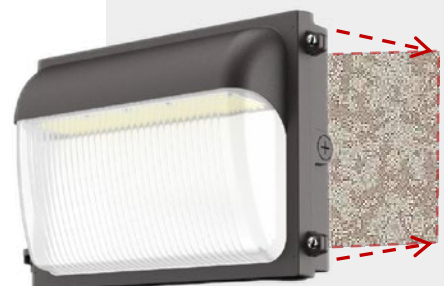

Wattage Selectable - 30Watts / 40Watts / 50Watts / 60Watts
Light Colour Selectable - 3000K / 4000K / 6000K

Parameters

Model No.	KR-Adjustable Wall Pack					
Lumen	3,750lm@30W	5,000lm@40W	7,500lm@60W			
Color Temperature						


Remarks: All above lumens are subject to 5000K, please check IES files for accurate data.

Efficacy	125LM/W (±10%)	Operating Temperature	30-100W:-40°F to 122°F (-40°C to +50°C) 120W:-40°F to 104°F (-40°C to +40°C)
Input voltage	120-277VAC/120-347VAC	Operating Humidity	RH<90%
THD	<20%	Storage Temperature	-40°F to 176°F (-40°C to +80°C)
LED Type	2835	Storage Humidity	RH<90%
Lens	Tempered glass	Color Rendering Index	Ra>70
IP Rating	IP65	Finish	Black/Bronze/Customized (Optional)
Power Factor	≥0.90	Surge Protection	L-N: 2KV, L/N-PE:4KV
Frequency	50/60Hz	Additional Function	3CCT Selectable, Wattage Switchable, Photocell, Motion Sensor, 8W Emergency Driver Optional
Housing	Die-cast Aluminum	Angle of illumination	90°±12°
Life Time	L70 @ 54,000Hrs		
Warranty	3 Years		



Accessories

Remarks: please contact your sales representative for specification of accessories.



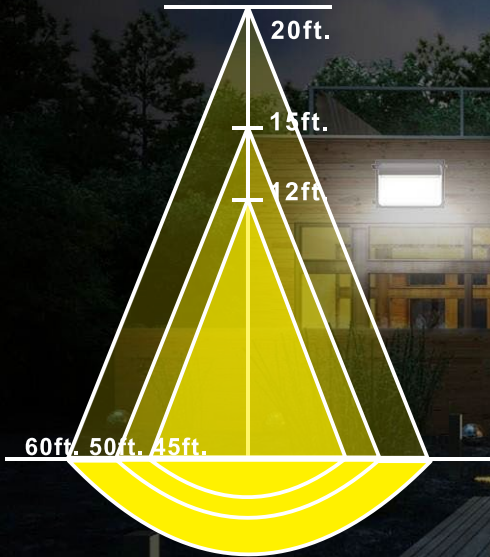

Product Dimension

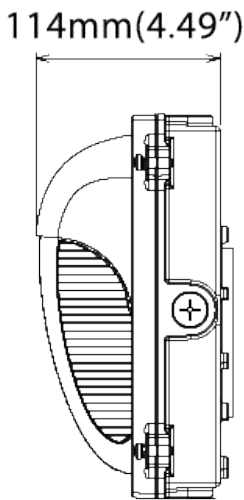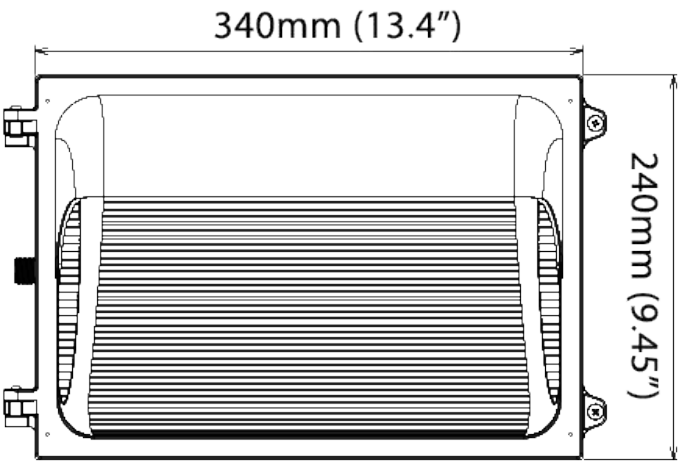

Packing Info

Estimate Gross Weight:xxx. Specific weight subject to the actual goods.

Model No.	Product Dimension (mm&inch)	Carton Size (mm&inch)	PCS/CTN	20GP	40HQ
KR-Adjustable Wall Pack	340X240X114mm 13.4"X9.45"X4.49"	390X285X155mm 15.4"x11.2"x6.1"	1	1555pcs	3777pcs